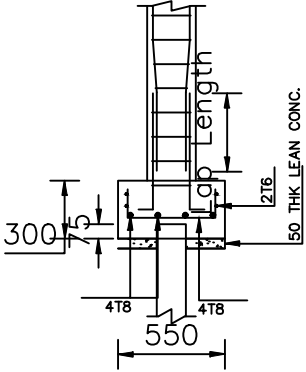
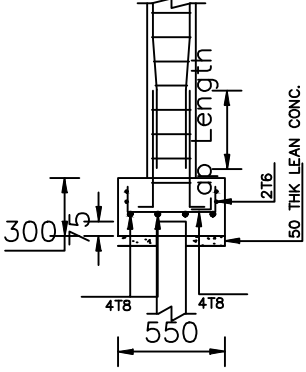
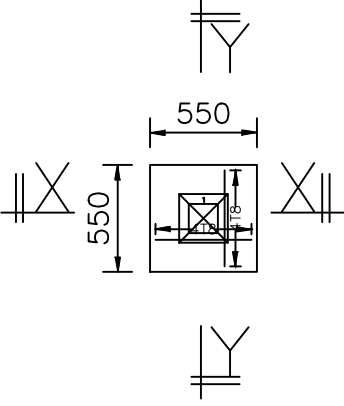





PILECAP	PILECAP DIMENSION			REINFORCEMENT			NO. OF PILES	PILE SIZE (mm)	CAPACITY of PILE (tonnes)
MARK	B,mm	L,mm	H,mm	XDirBar	YDirBar	TIES			
P2	550	550	300	4T8	4T8	2T6	1	150 X 150	35
P4	600	600	300	4T8	4T8	2T6	1	150 X 150	35
P5	700	550	300	4T8	5T8	2T6	1	150 X 150	35
P6	550	700	300	4T8	4T8	2T6	1	150 X 150	35
P7	650	600	300	4T8	4T8	2T6	1	150 X 150	35
P9	700	650	300	4T8	5T8	2T6	1	150 X 150	35
P10	600	800	300	5T8	4T8	2T6	1	150 X 150	35
P11	900	550	500	5T10	6T10	3T6	2	150 X 150	35
P12	900	600	300	4T8	5T8	2T6	2	150 X 150	35
P13	900	600	350	4T10	6T8	2T6	2	150 X 150	35
P14	950	600	300	4T8	6T8	2T6	2	150 X 150	35
P15	900	650	350	6T8	6T8	2T6	2	150 X 150	35
P16	900	700	300	4T8	5T8	2T6	2	150 X 150	35
P17	900	840	500	6T10	7T10	4T6	3	150 X 150	35
P18	878	938	400	8T8	7T8	2T6	3	150 X 150	35
P19	930	990	350	7T8	8T8	2T6	3	150 X 150	35
P20	900	900	450	6T10	6T10	3T6	4	150 X 150	35









PILE FOUNDATION REINFORCEMENT SCHEDULE

Y View	X View	Plan	P2
			





PAD FOOTING	PAD FOOTING DIMENSION			REINFORCEMENT		
MARK	B,mm	L,mm	H,mm	XDirBar	YDirBar	TIES
P5	700	700	250	4T8	5T8	2T6
P6	750	750	250	5T8	5T8	2T6

FOOTING FOUNDATION REINFORCEMENT SCHEDULE

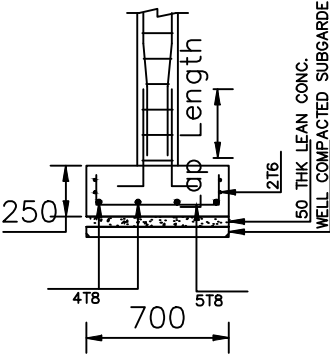
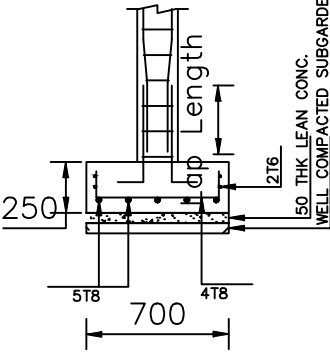
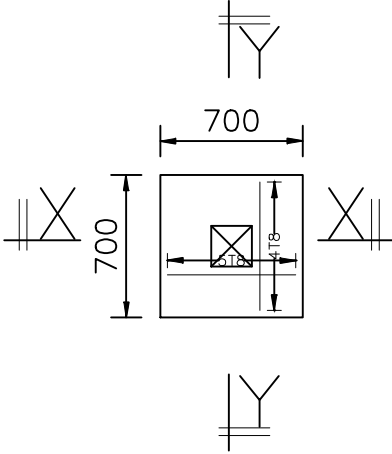
Y View	X View	Plan	P5
			

COLUMN MARK FLOOR		C3: (1,C)	C4: (1,D)	C5: (1,G)	C6: (1,J)
RB To GB					
	MAIN BAR	4T25	4T20	6T12	6T12
	OUTER TIES	T10 – 300	T10 – 225	T10 – 125	T10 – 125
	INNER TIES	Nil.	Nil.	T10 – 125	T10 – 125
	COL. SIZE	350 X 300	250 X 250	400 X 250	400 X 250
Stump (GB)					
	MAIN BAR	6T12	6T32	10T32	6T12
	OUTER TIES	T10 – 125	T10 – 150	T10 – 125	T10 – 125
	INNER TIES	T10 – 125	T10 – 150	T10 – 125	T10 – 125
	COL. SIZE	400 X 350	500 X 300	500 X 300	500 X 300


COLUMN REINFORCEMENT SCHEDULE


STIFFENER MARK		C66: (1,K)	C68: (1,M)	C69: (2,C)	C70: (2,N)
FLOOR					
RB To GB					
	MAIN BAR	4T12	4T12	4T16	4T20
	OUTER TIES	R6 – 125	R6 – 125	R8 – 175	R8 – 225
	INNER TIES	Nil.	Nil.	Nil.	Nil.
	COL. SIZE	225 X 225	225 X 225	200 X 200	200 X 200

STIFFENER REINFORCEMENT SCHEDULE

STUMP MARK		C46:(11,H)	C47:(11,I)	C81:(1,H1)
FLOOR				
Stump (GB)				
	MAIN BAR	4T20	4T20	4T16
	OUTER TIES	T10 – 225	T10 – 225	T10 – 175
	INNER TIES	Nil.	Nil.	Nil.
	COL. SIZE	250 X 250	250 X 250	250 X 250





STUMP REINFORCEMENT SCHEDULE

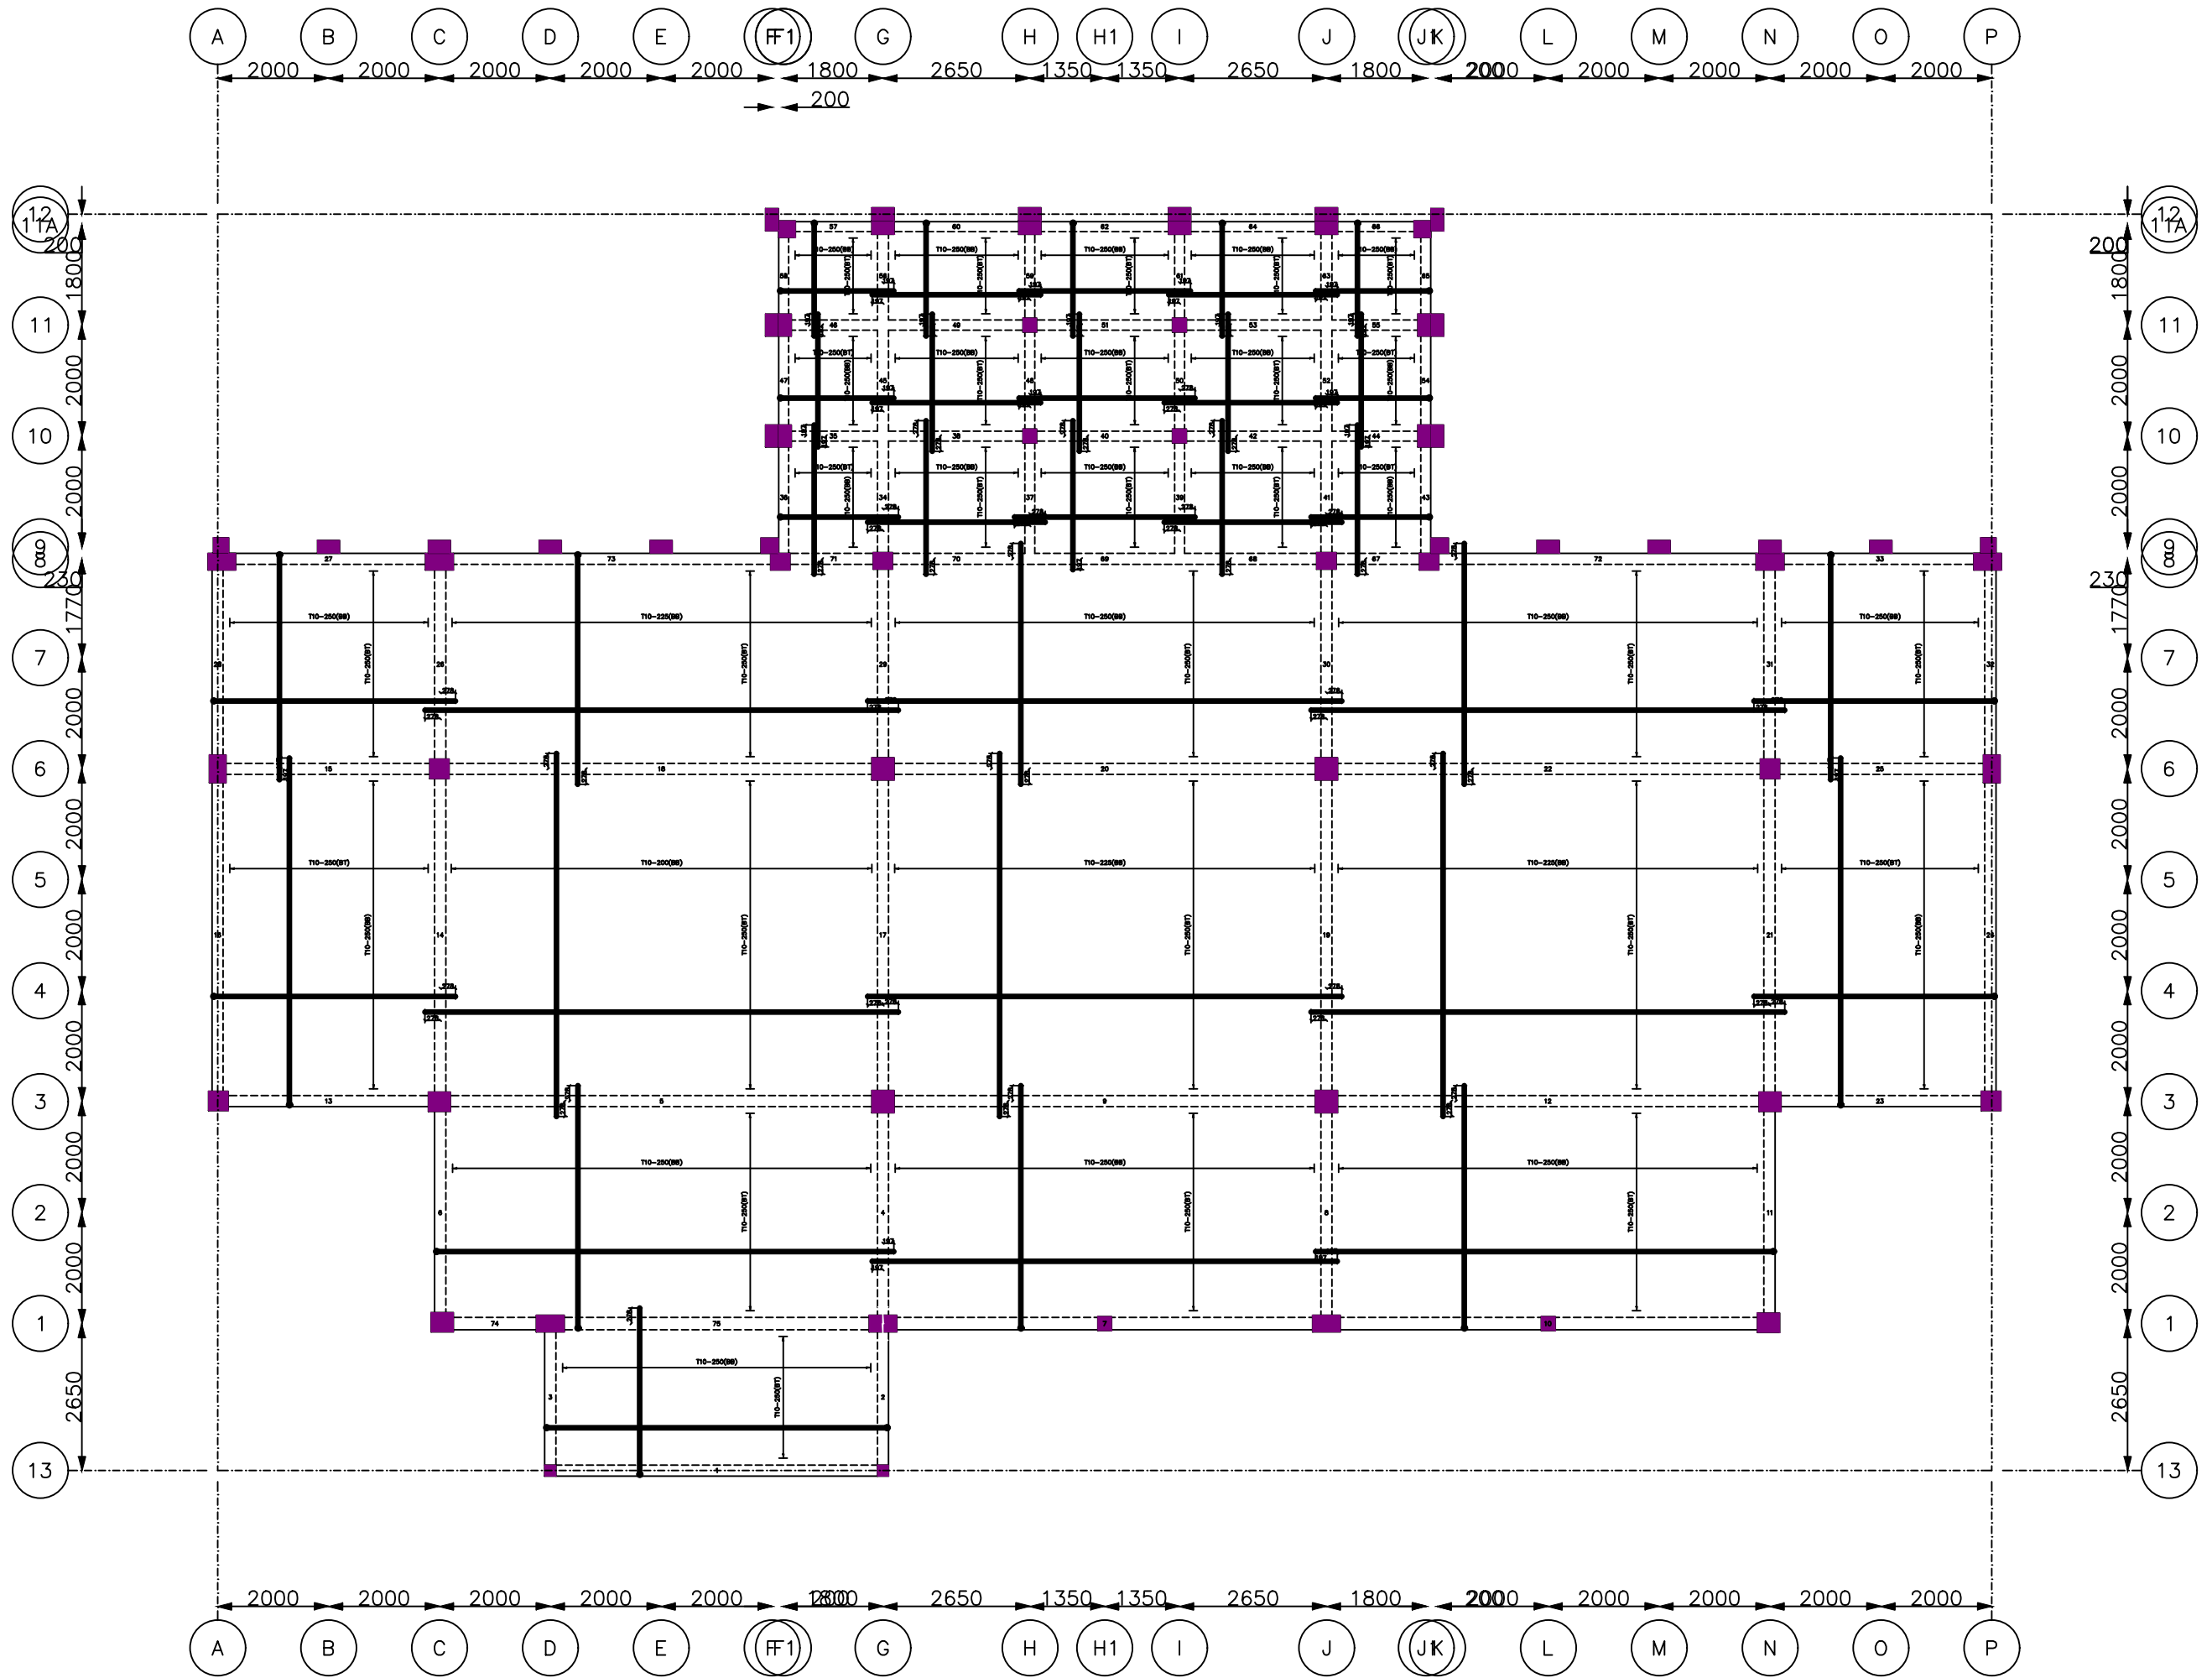

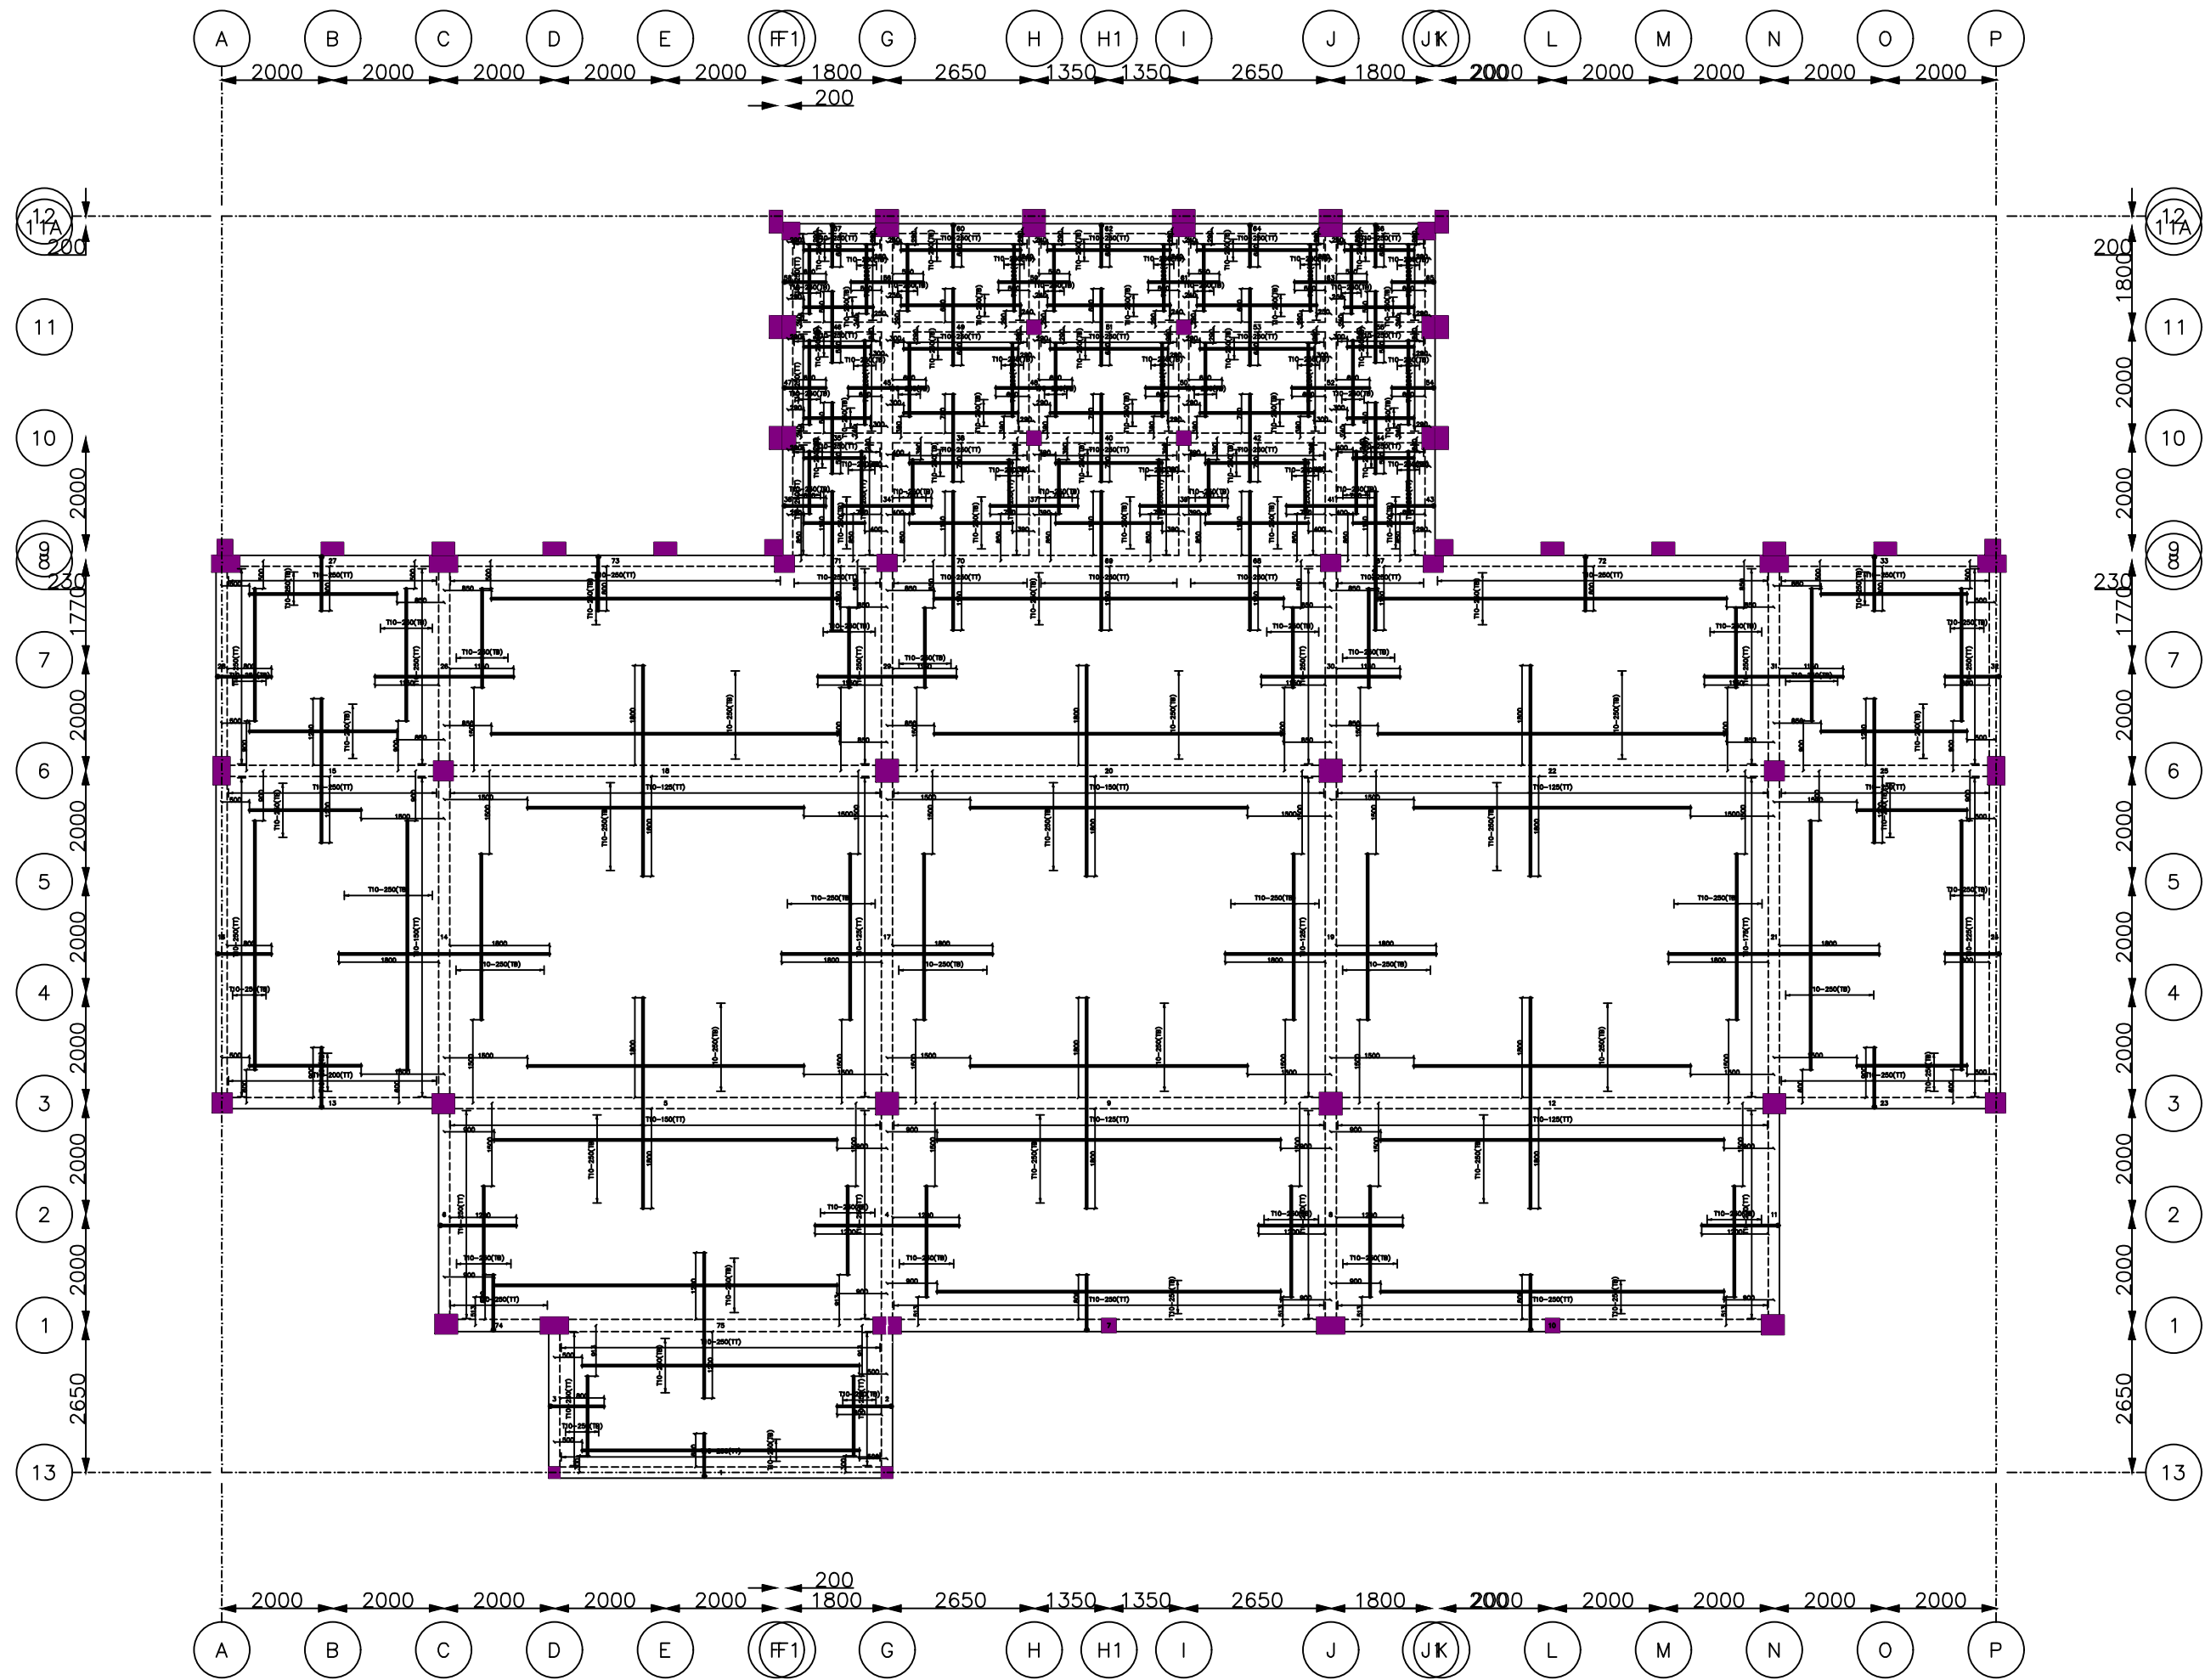





ALL SLAB THICKNESS = 150MM THK. UNLESS OTHERWISE STATED

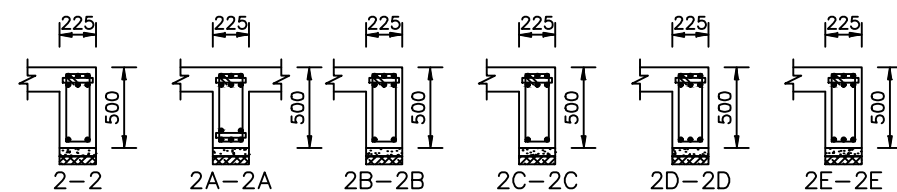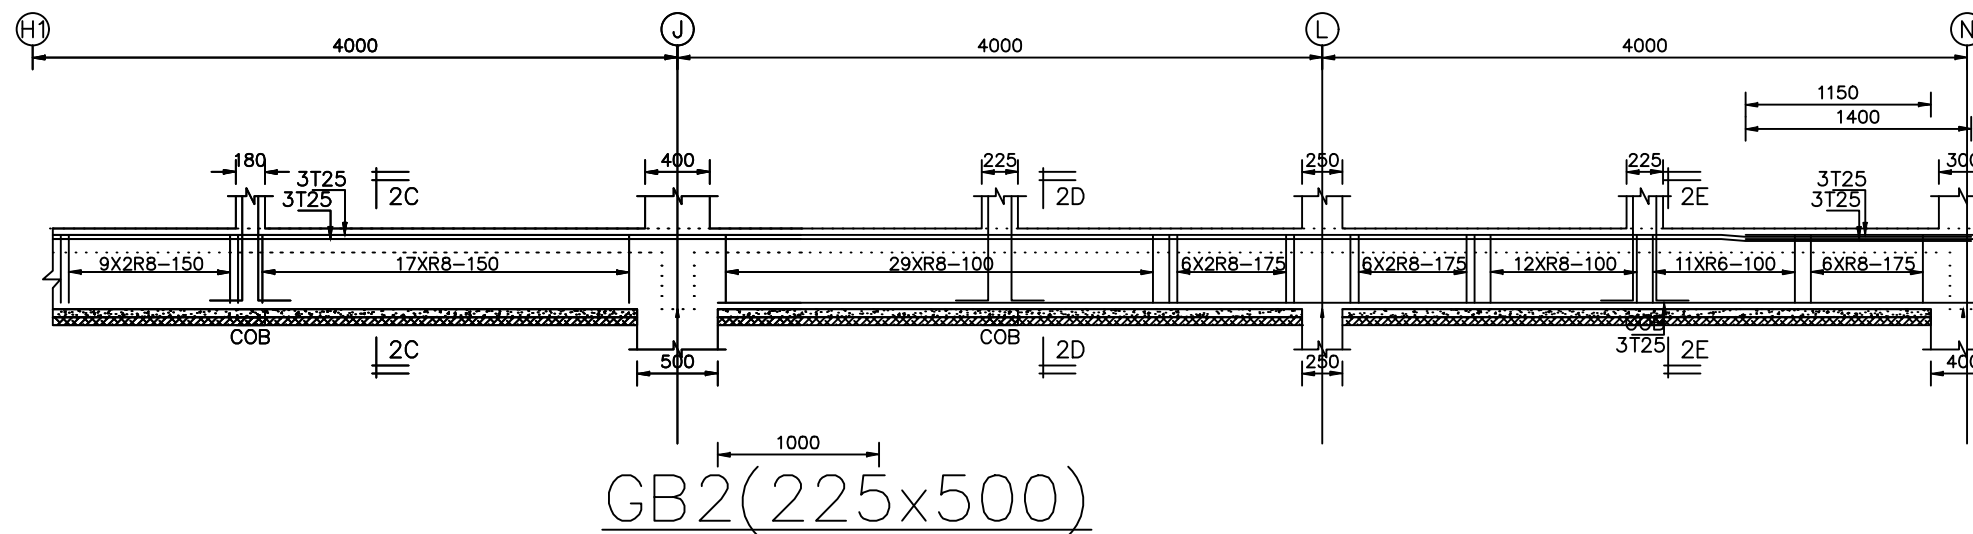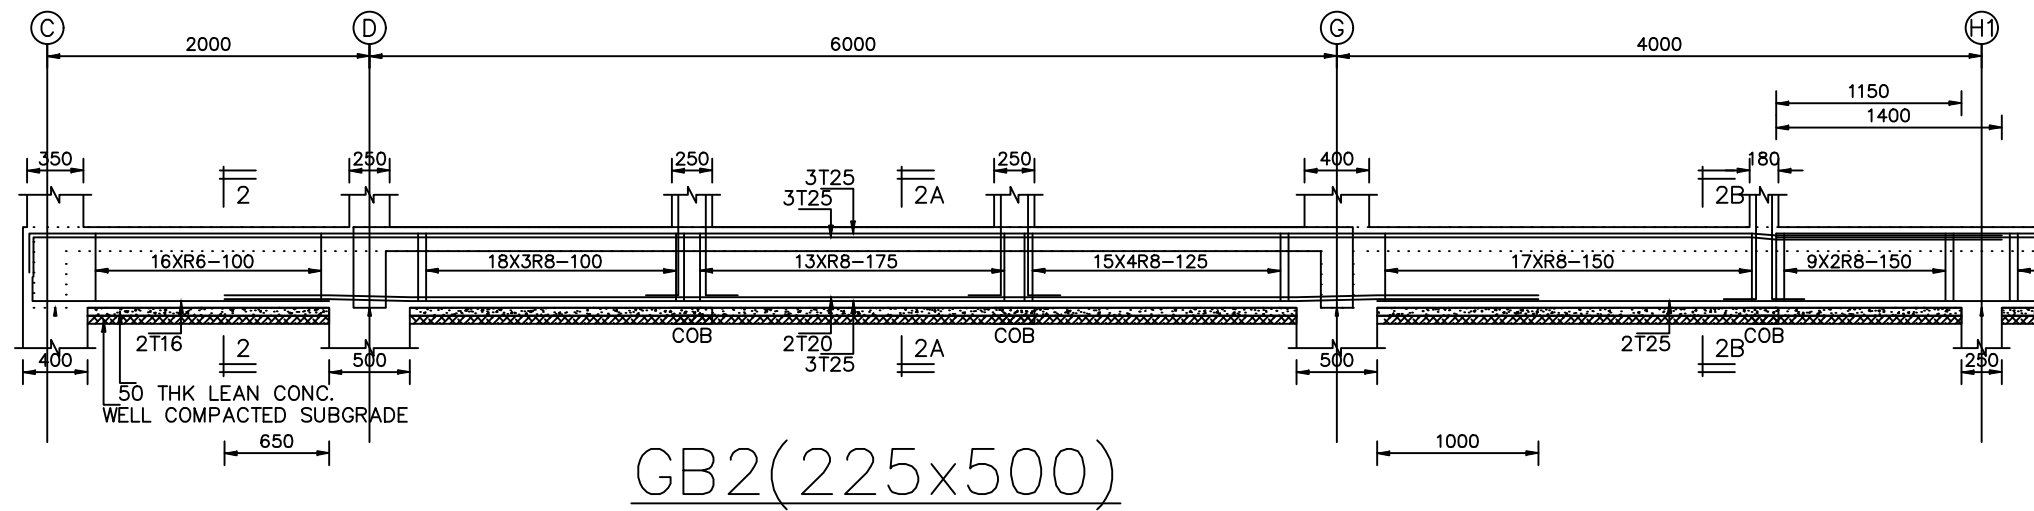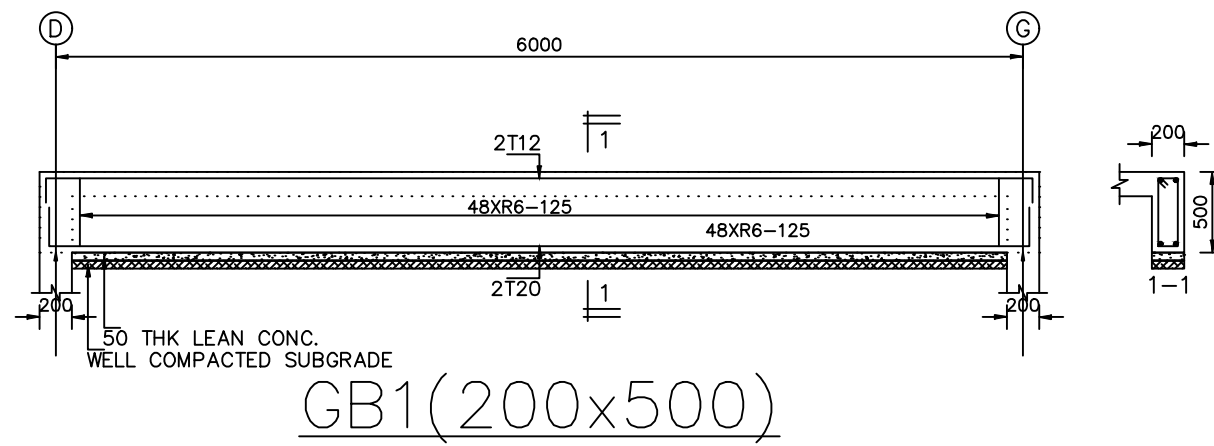


GB2(225x500)

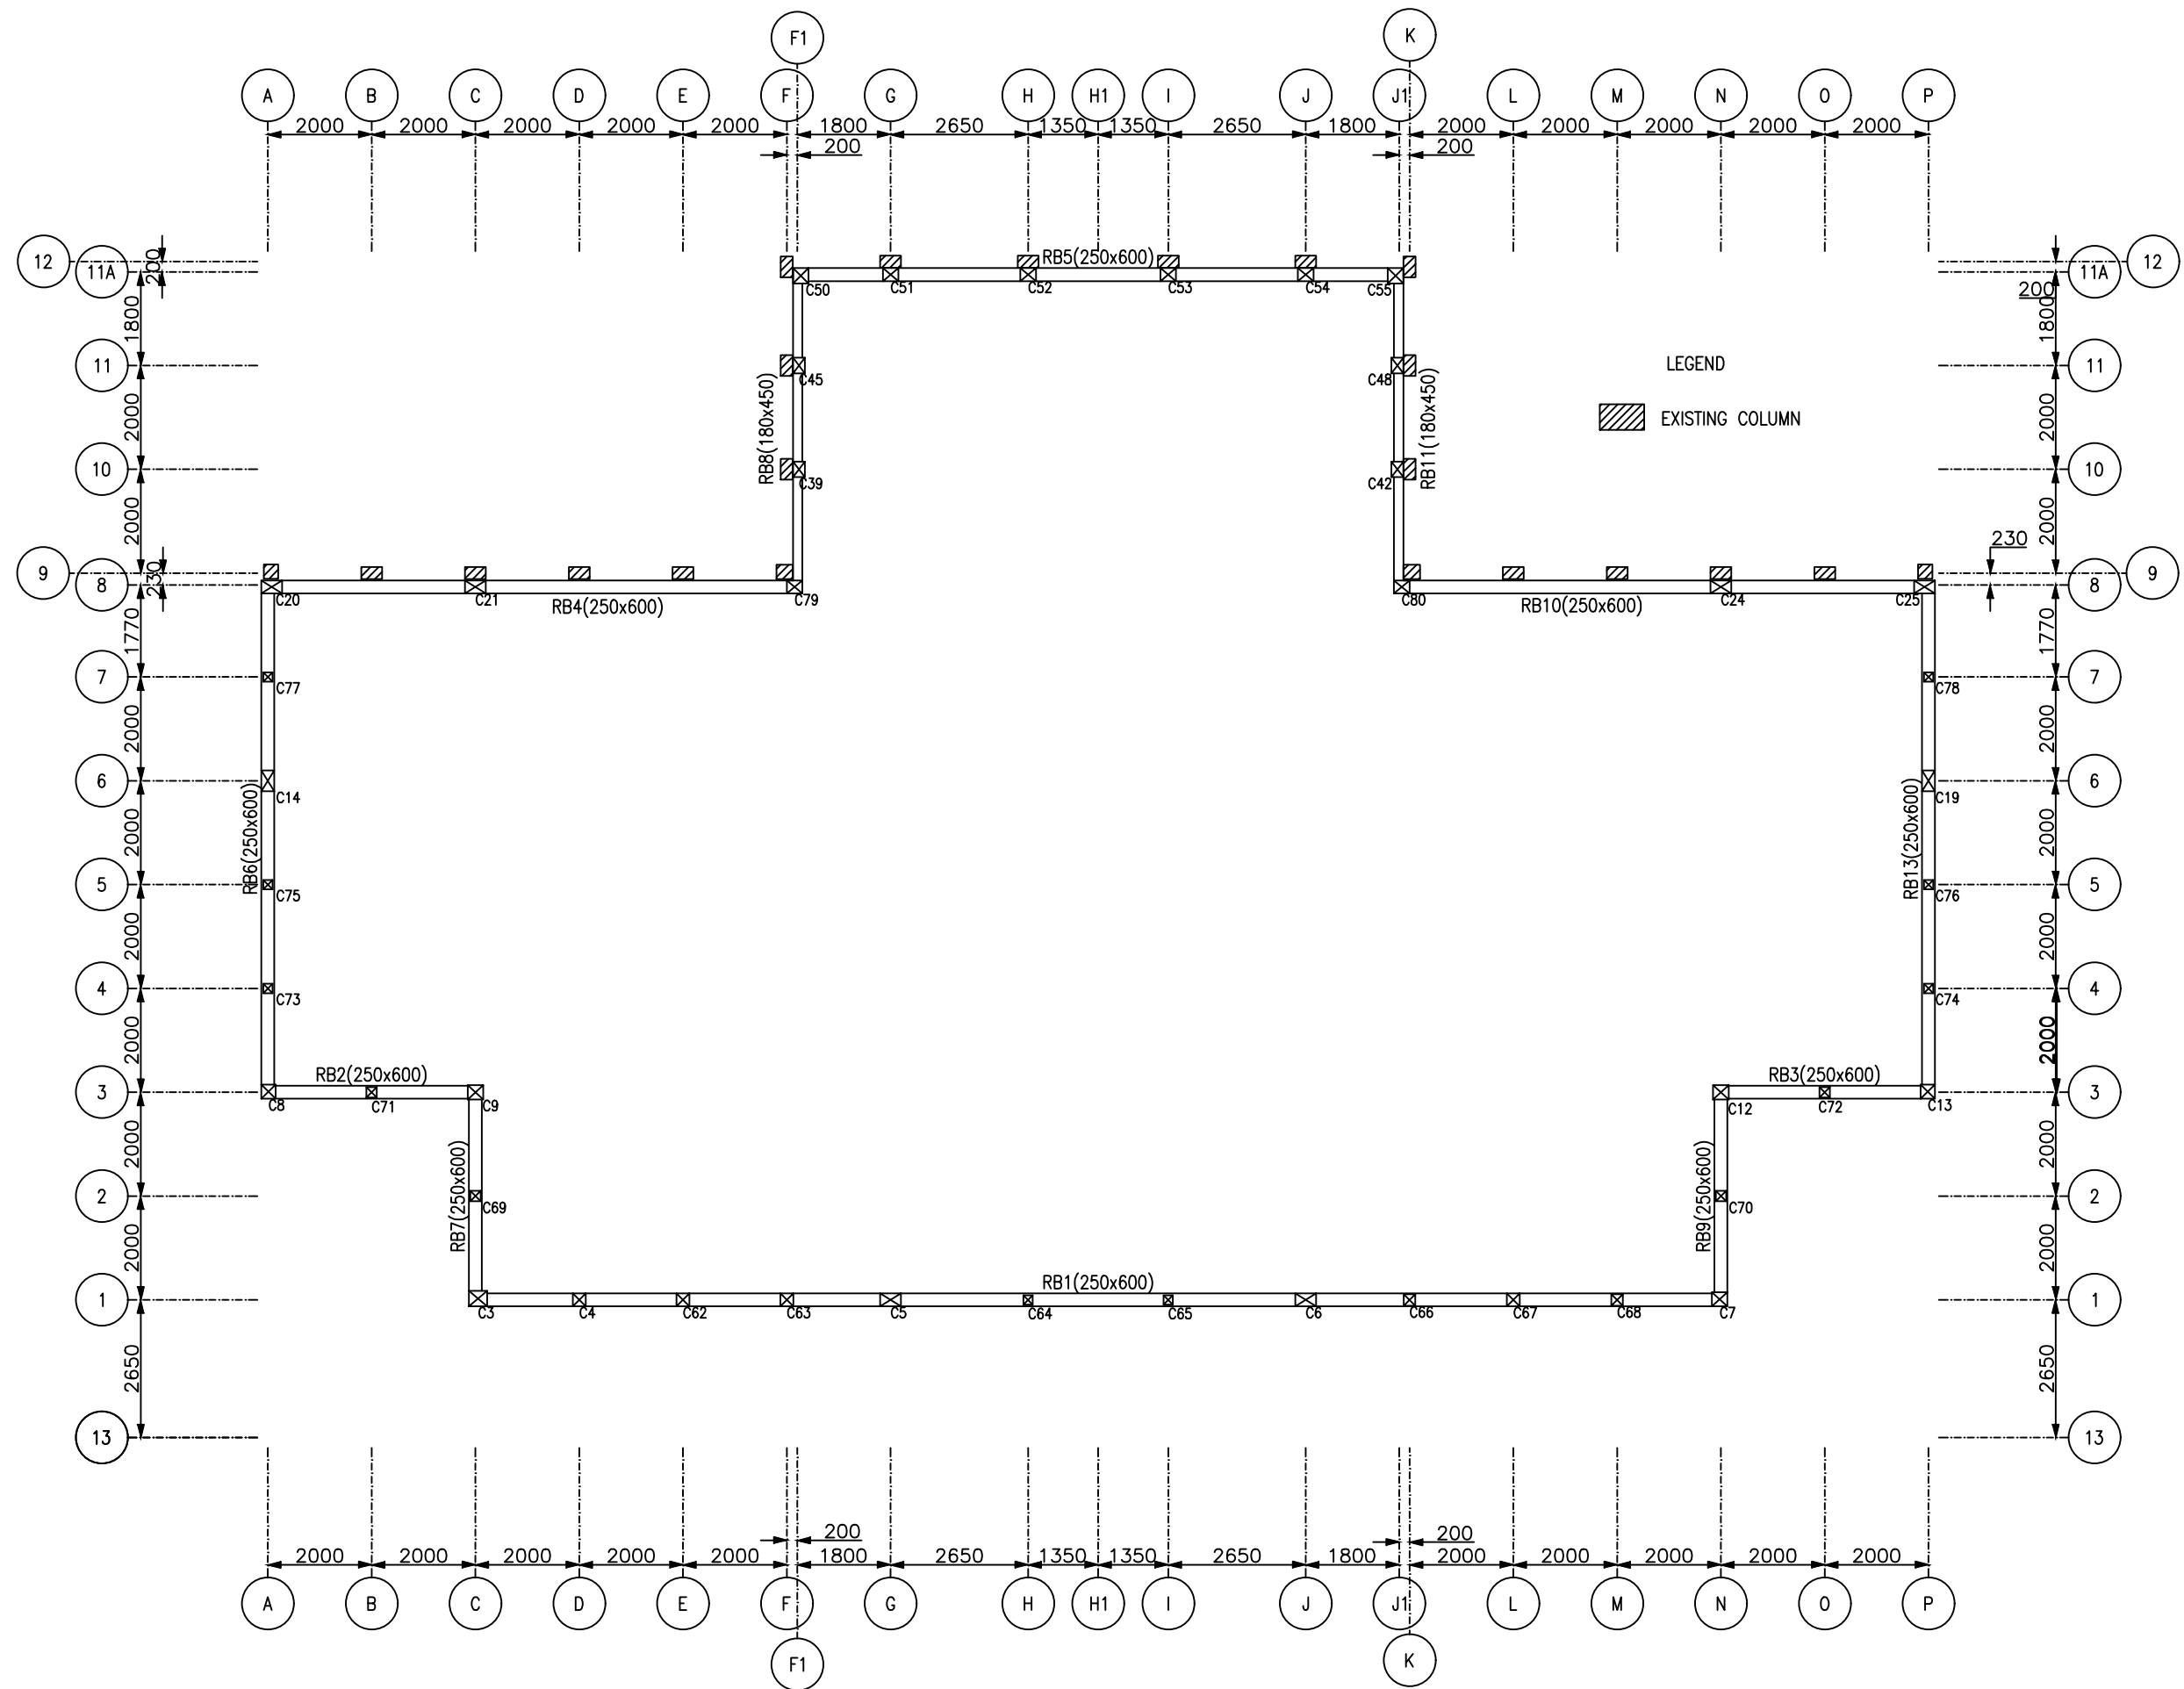


ROOF FLOOR KEY PLAN: RB

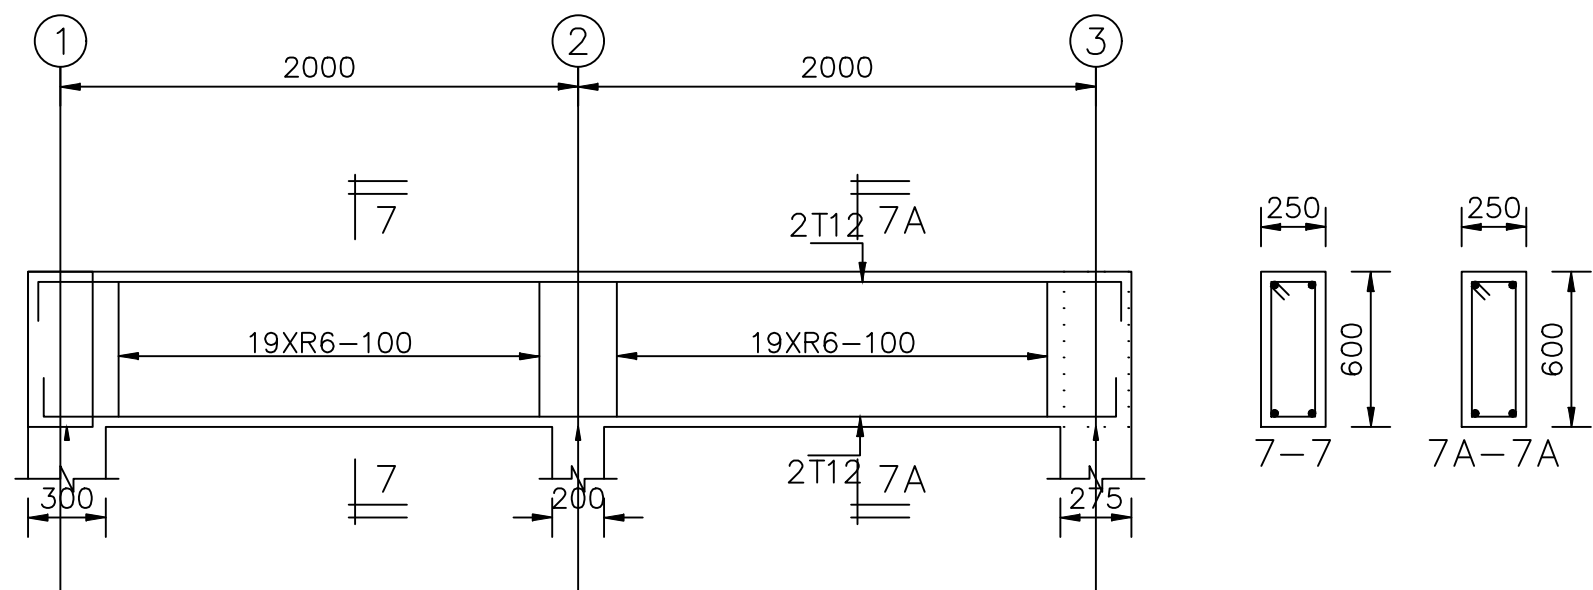


RB7(250x600)

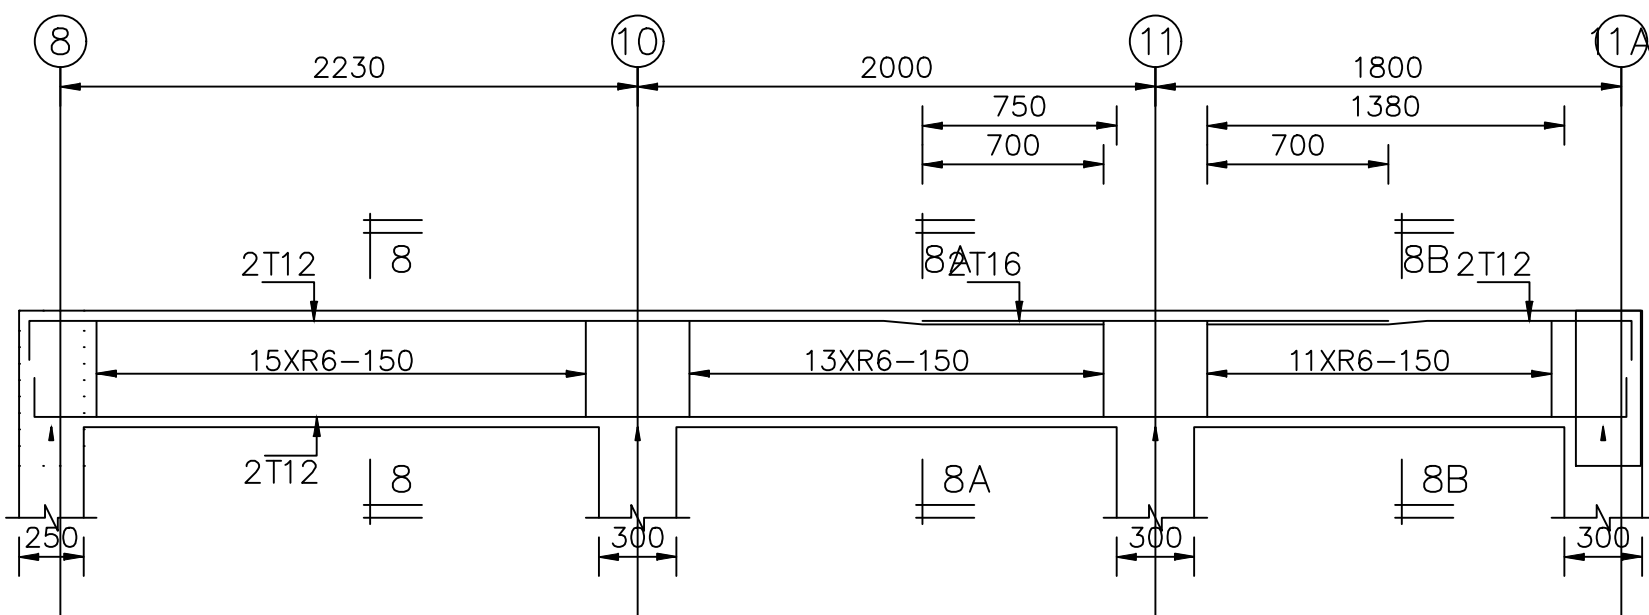

RB8(180x450)

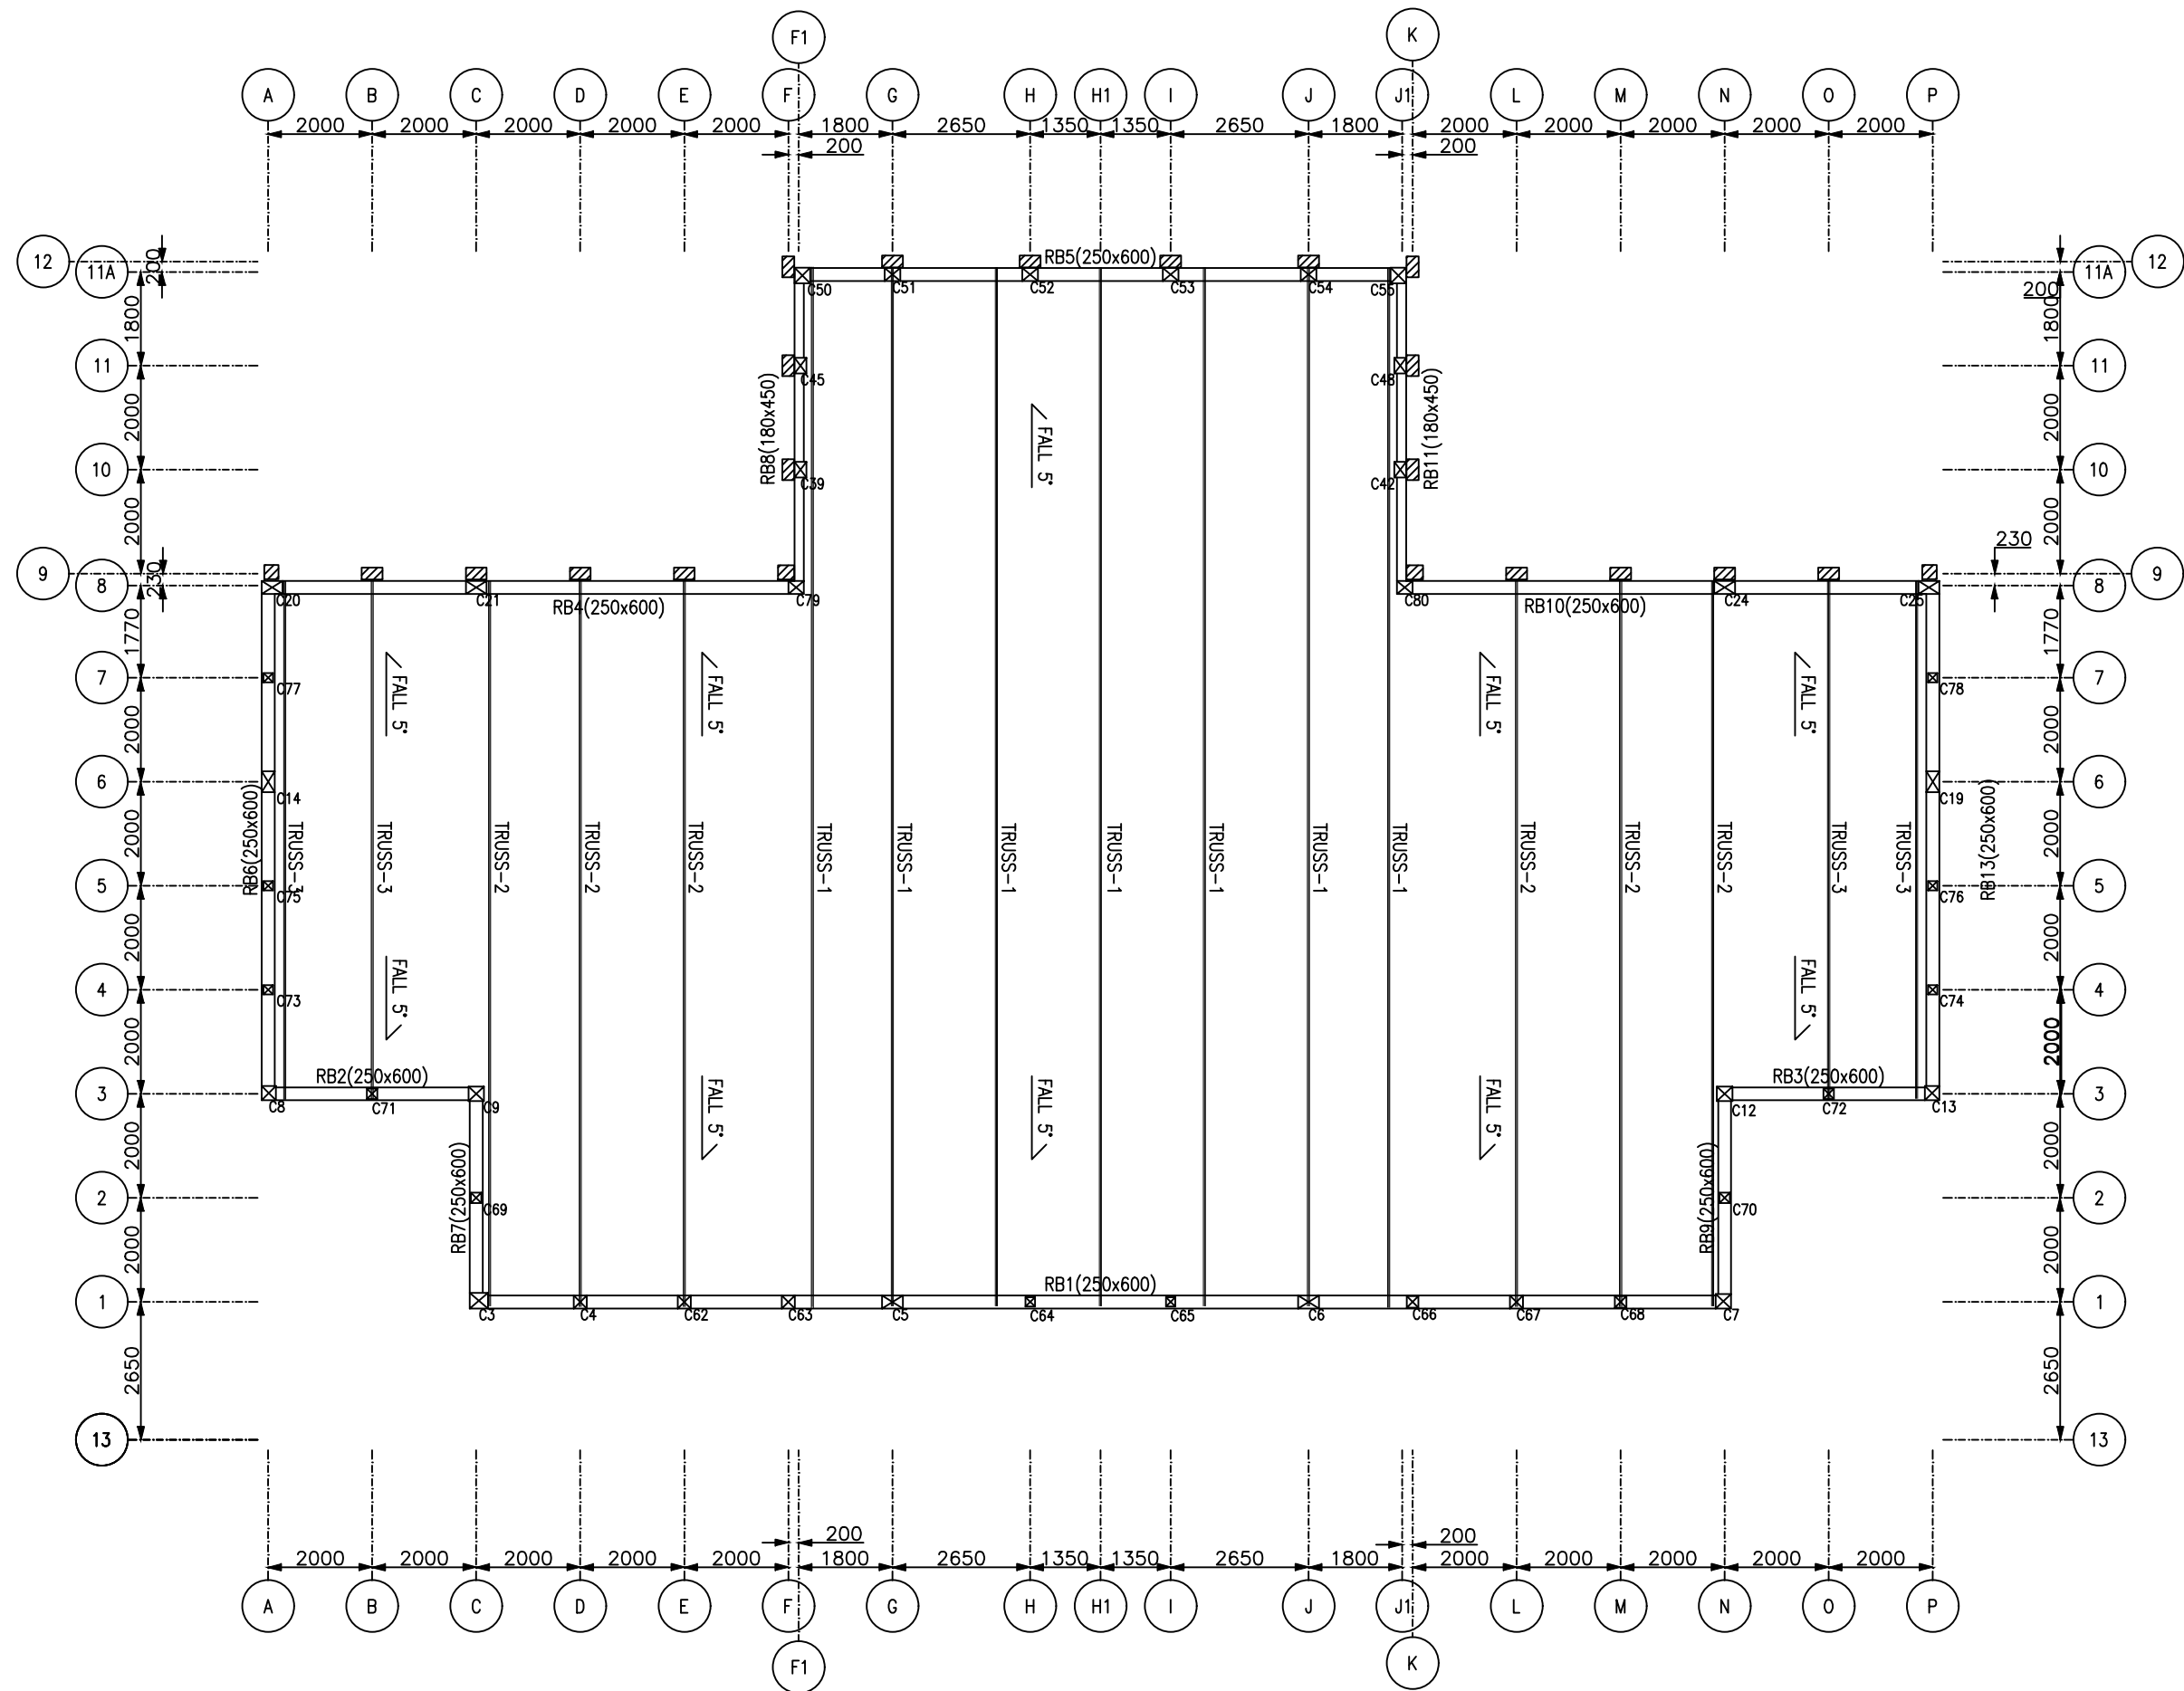

ROOF TRUSS PLAN: RB

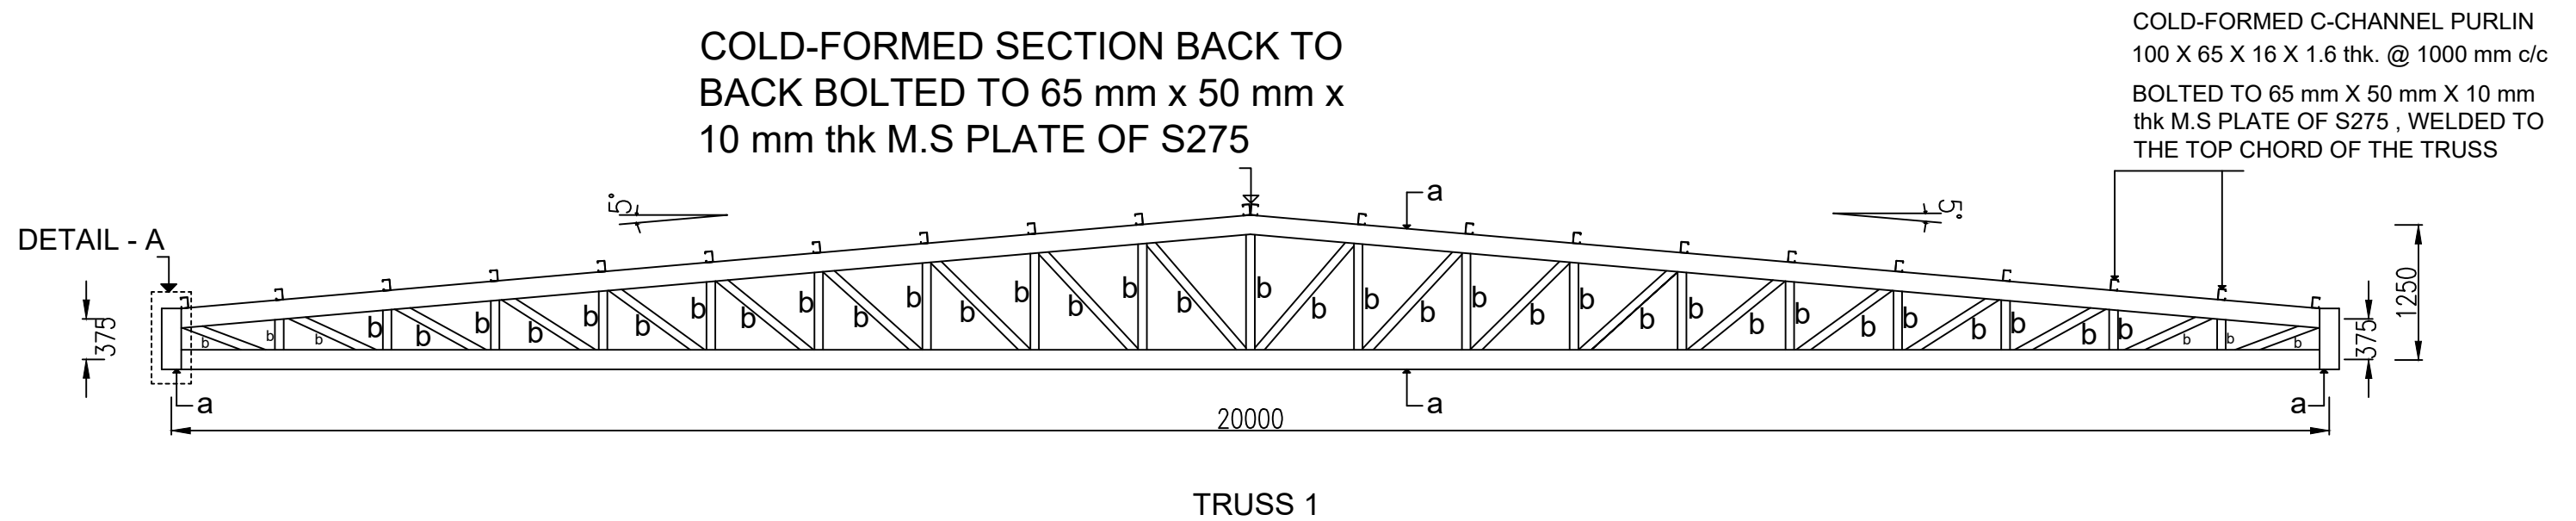

TRUSS 1


a - RHS 180mm X 80mm X 8mm Thk.


b - RHS 80mm X 40mm X 8mm Thk.

ALL TRUSS MEMBERS CONNECTED BY 6 mm FILLET WELD

ALL UNITS IN (mm)

TYPICAL SECTION OF COLD - FORMED C-CHANNEL PURLIN

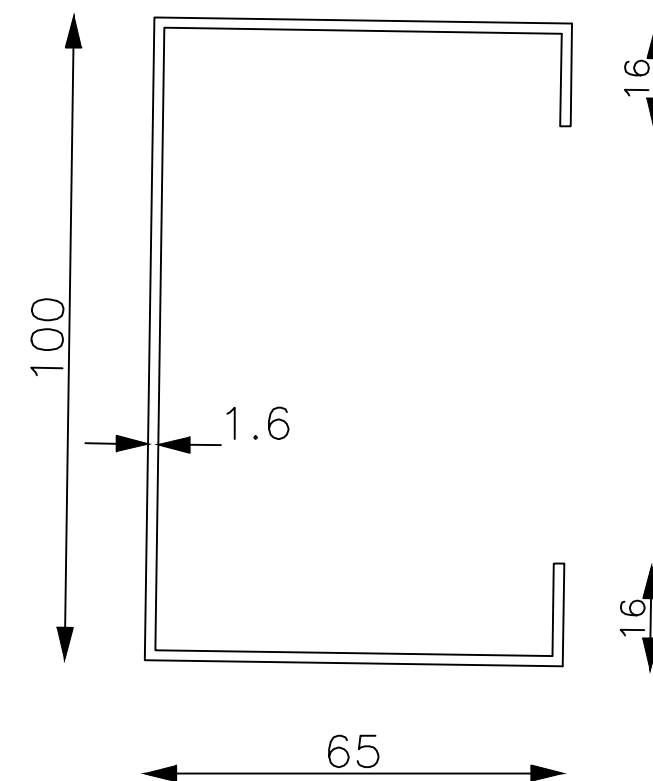

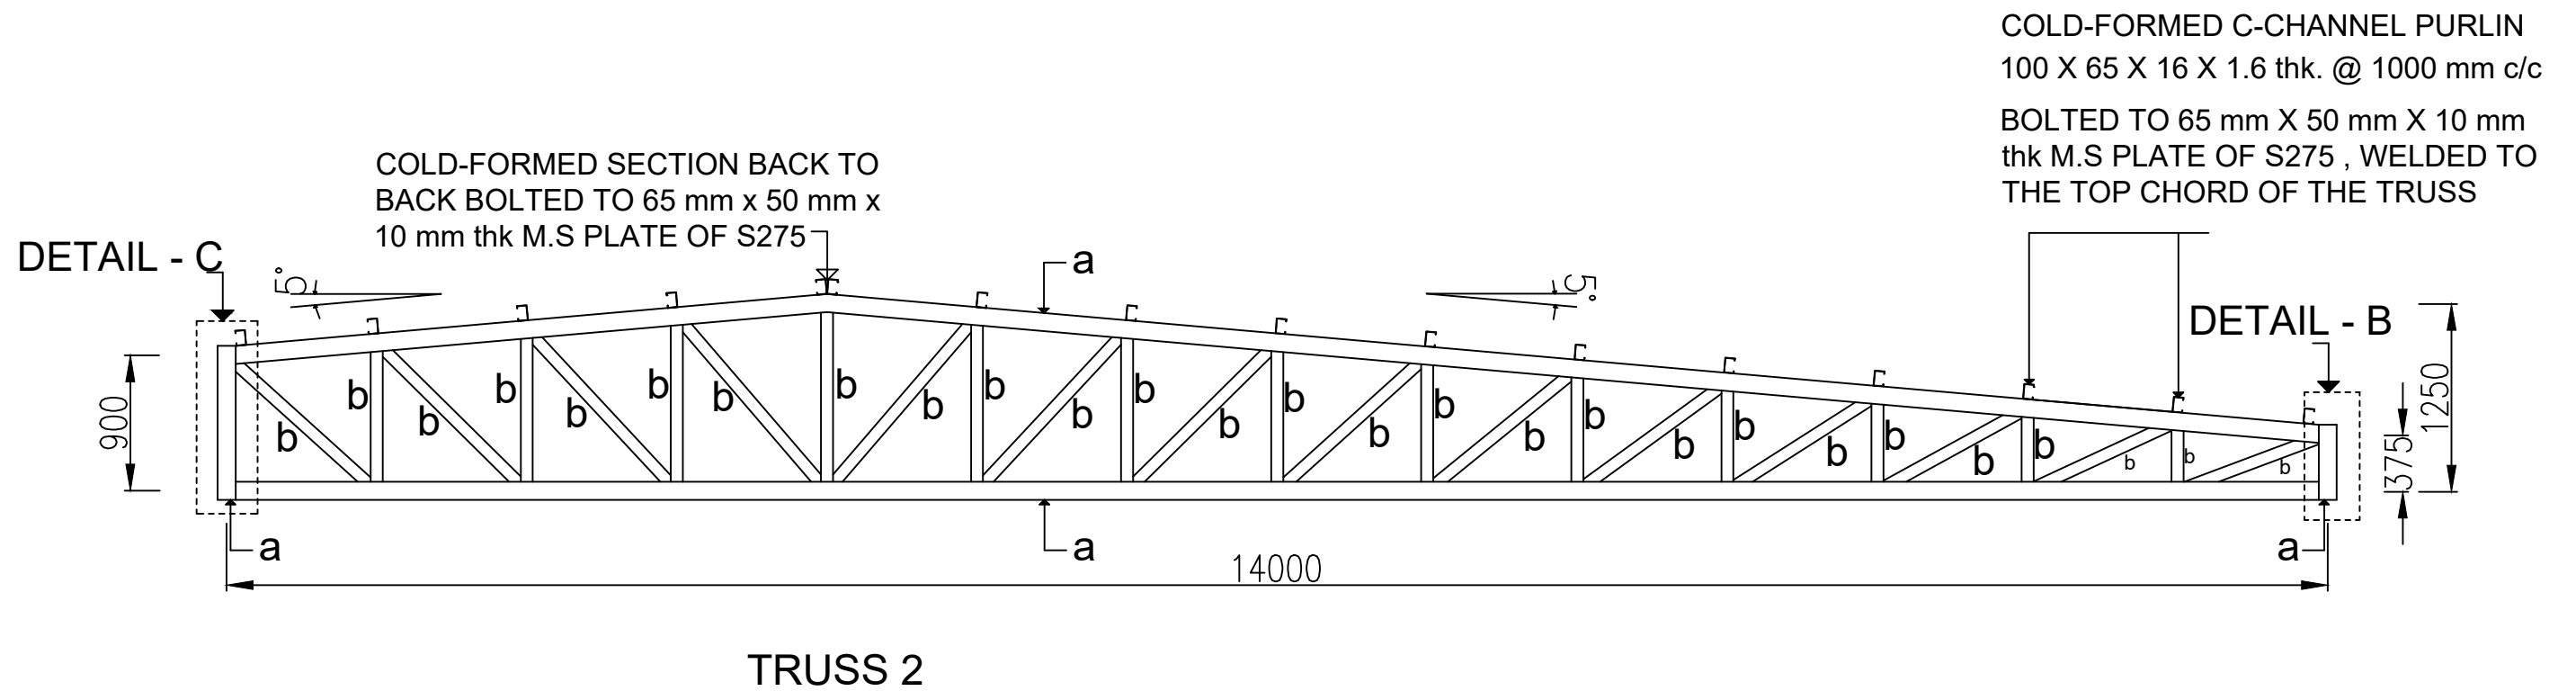

TRUSS 2


a - RHS 120mm X 50mm X 8mm Thk.


b - RHS 80mm X 40mm X 5mm Thk.

ALL TRUSS MEMBERS CONNECTED BY 6 mm FILLET WELD

ALL UNITS IN (mm)

TYPICAL SECTION OF COLD - FORMED C-CHANNEL PURLIN

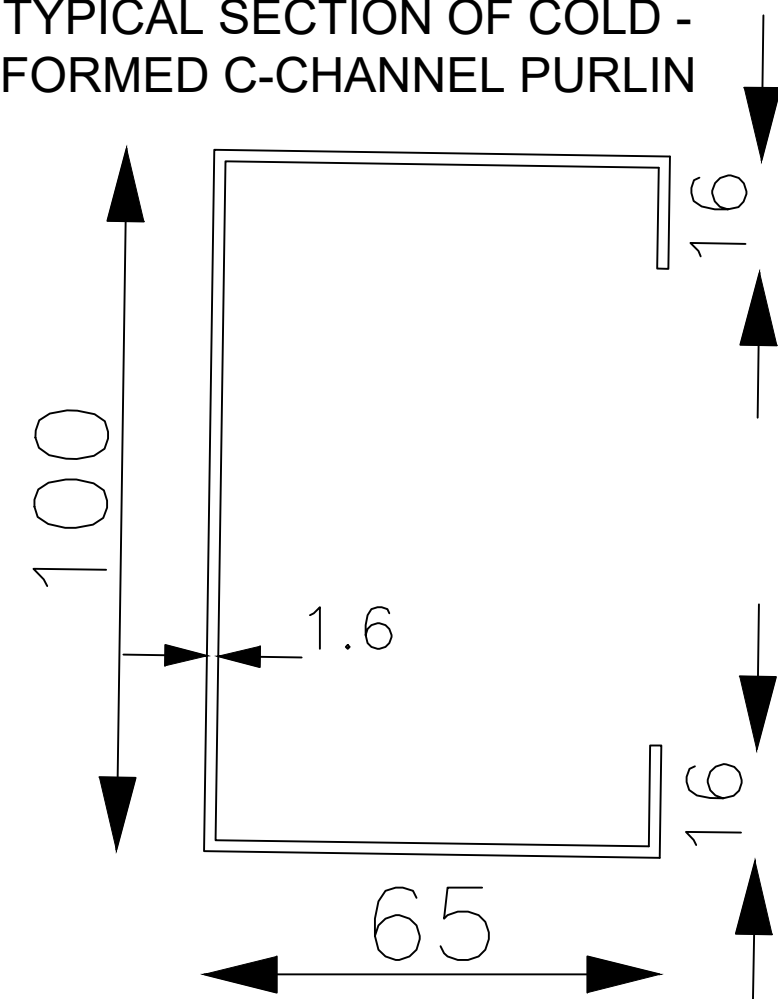

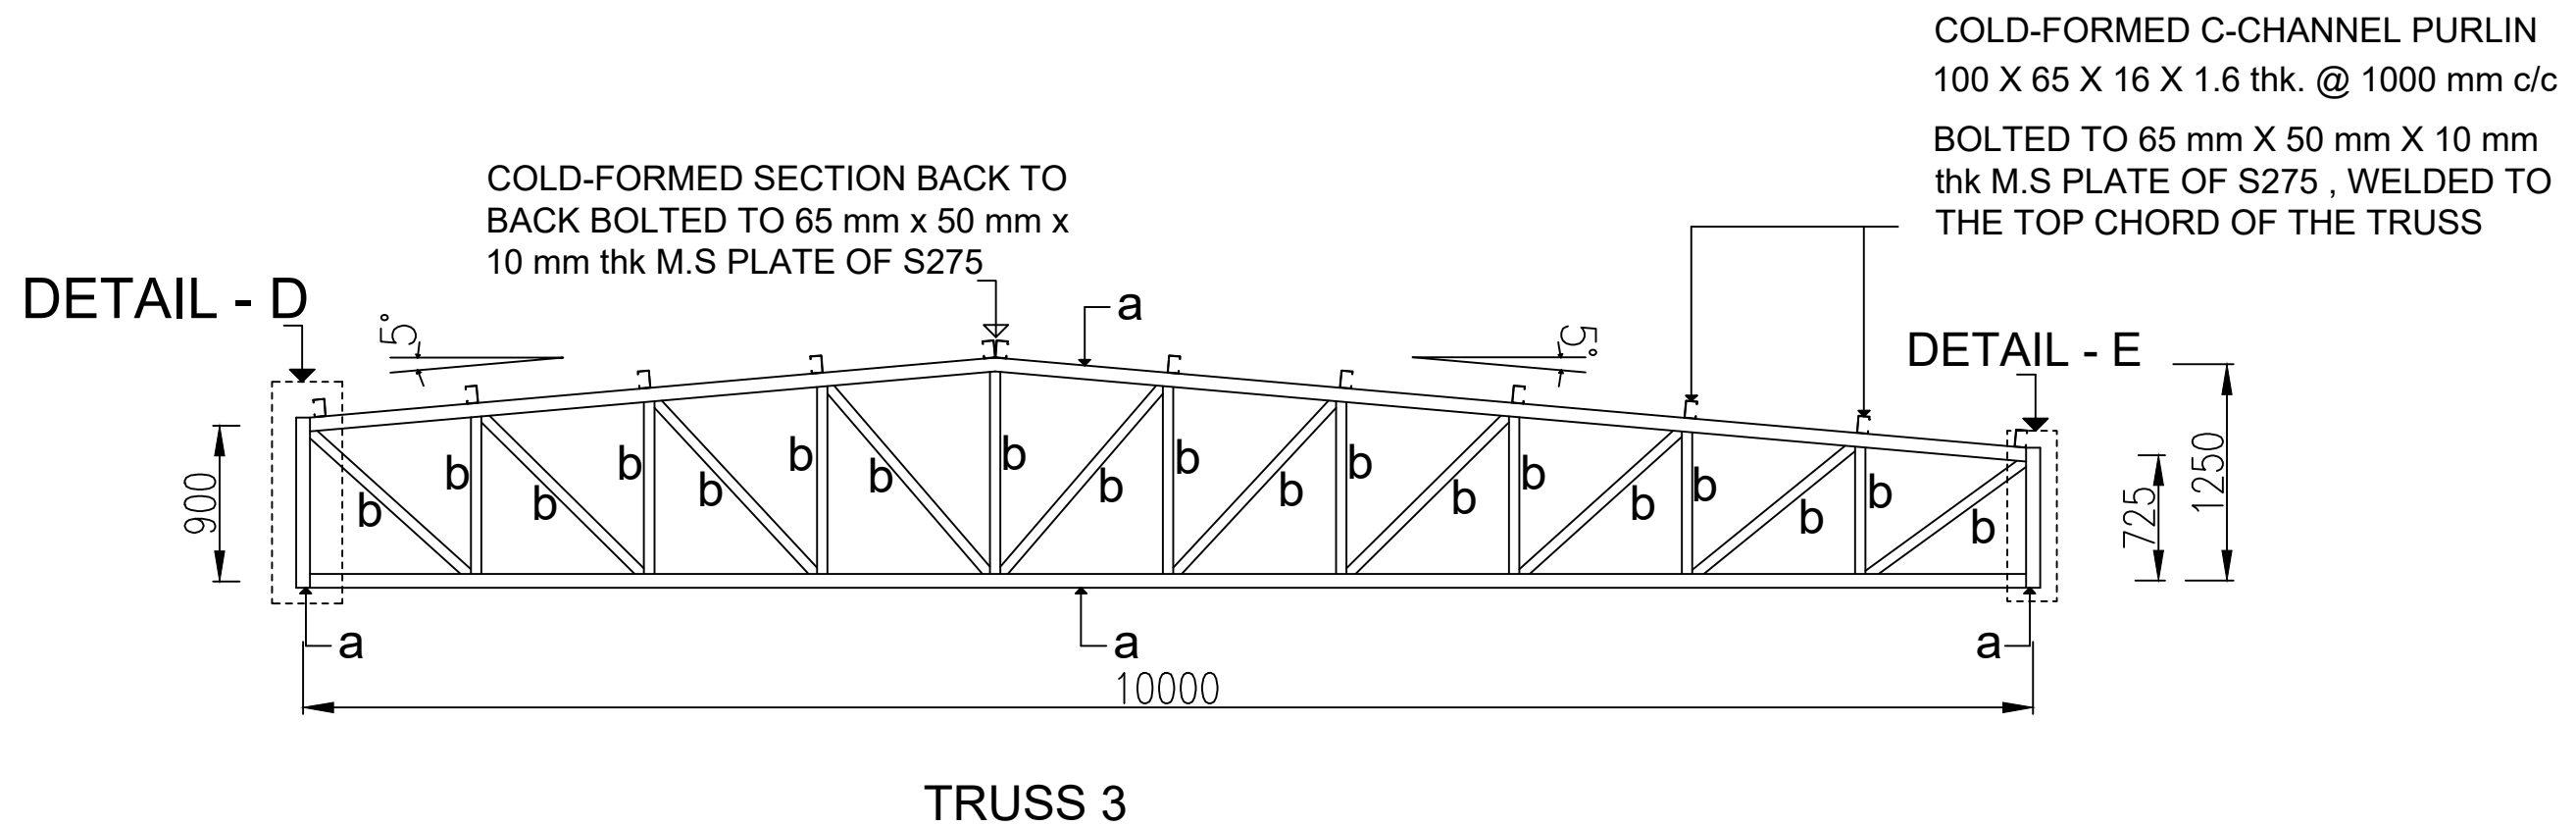

TRUSS 3


a - RHS 80mm X 40mm X 5mm Thk.


b - RHS 60mm X 40mm X 3mm Thk.

ALL TRUSS MEMBERS CONNECTED BY 6 mm FILLET WELD


ALL UNITS IN (mm)

TYPICAL SECTION OF COLD - FORMED C-CHANNEL PURLIN

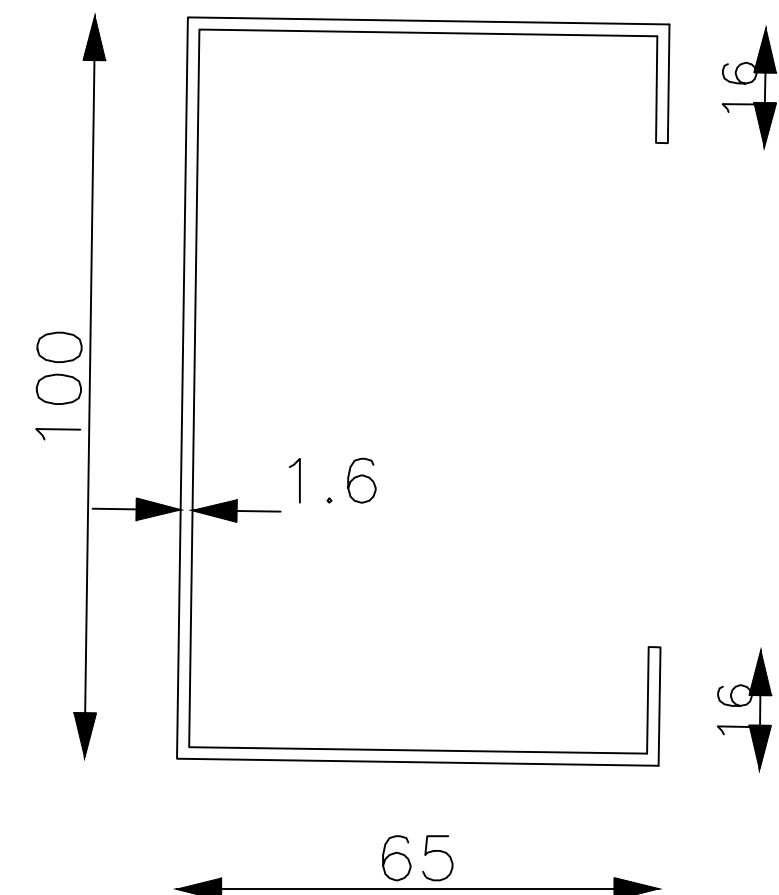

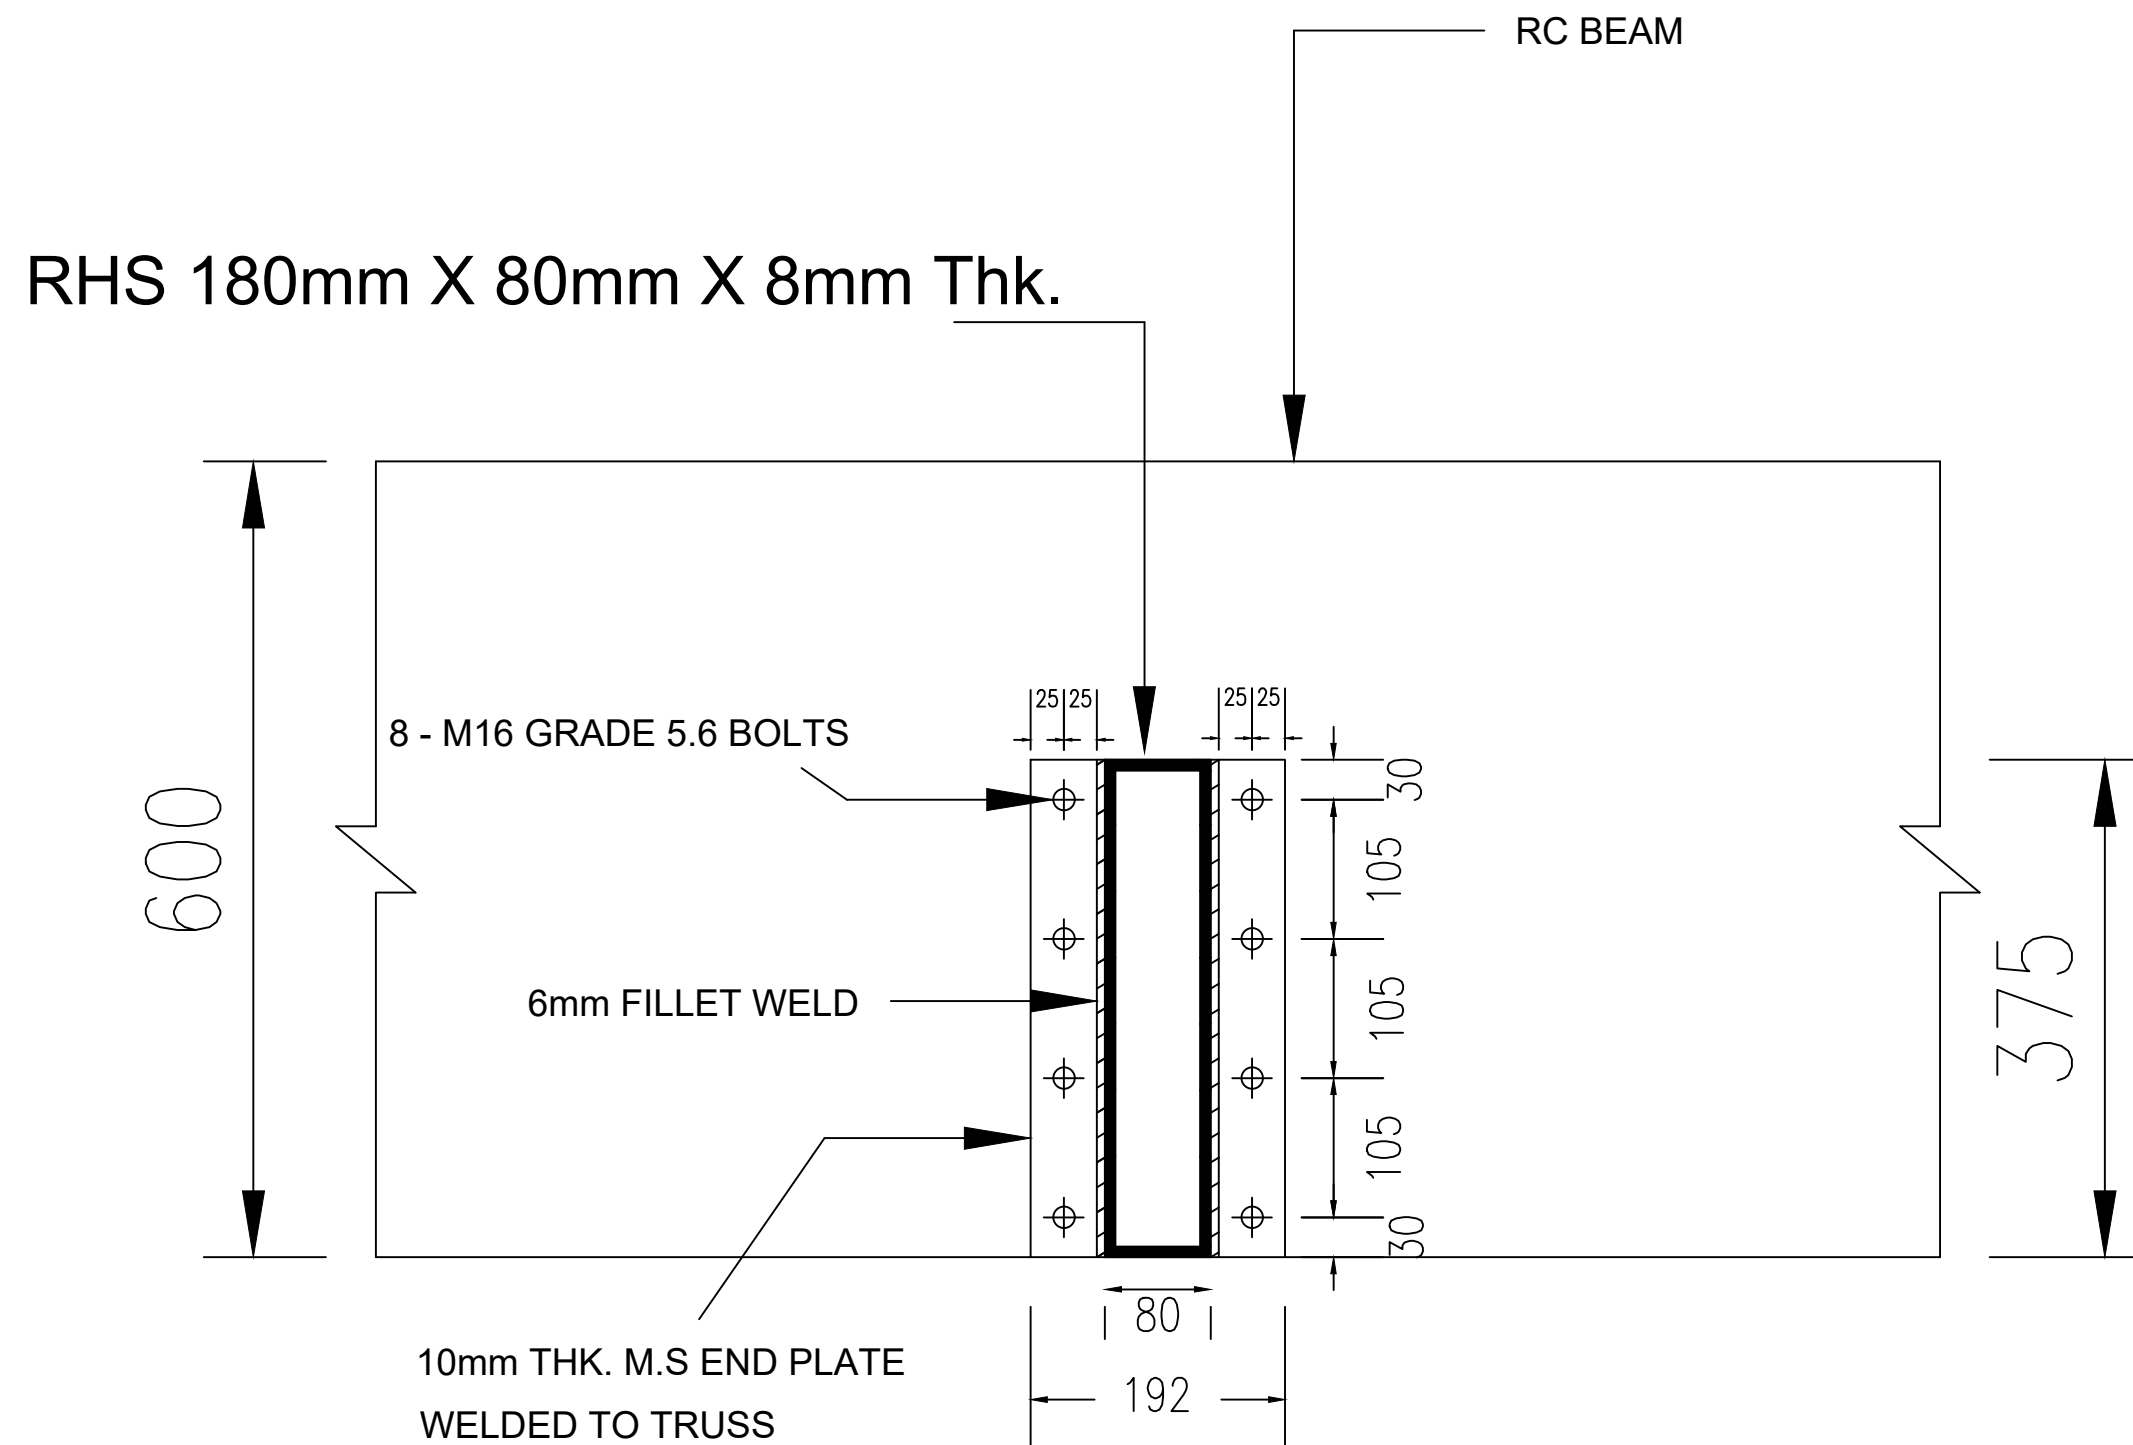


DETAIL - A

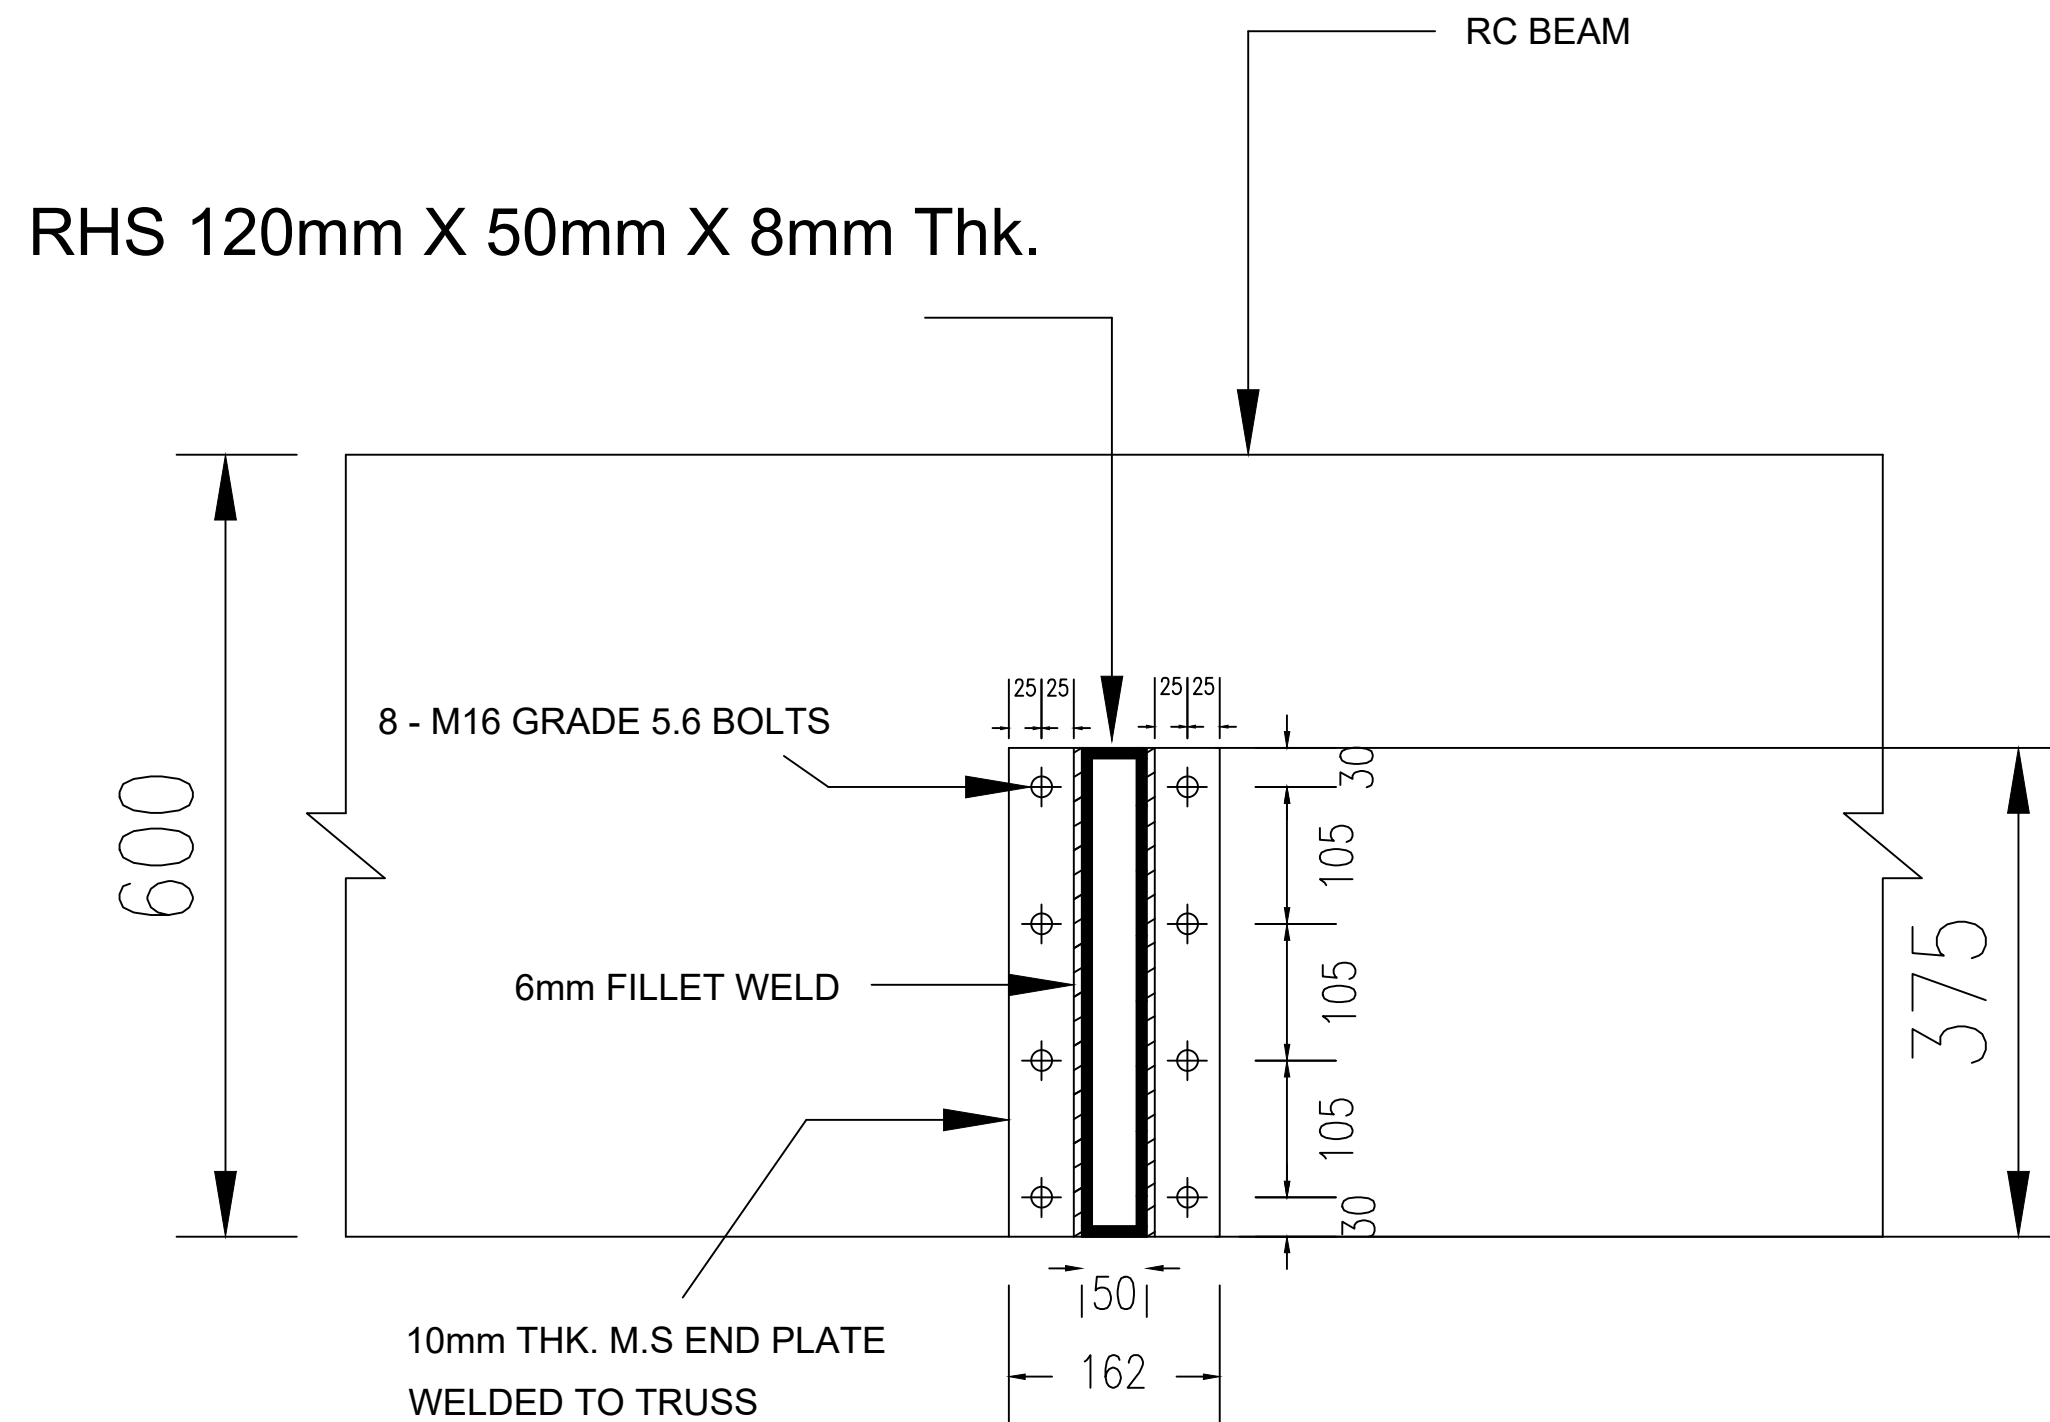


DETAIL - B

RHS 120mm X 50mm X 8mm Thk.

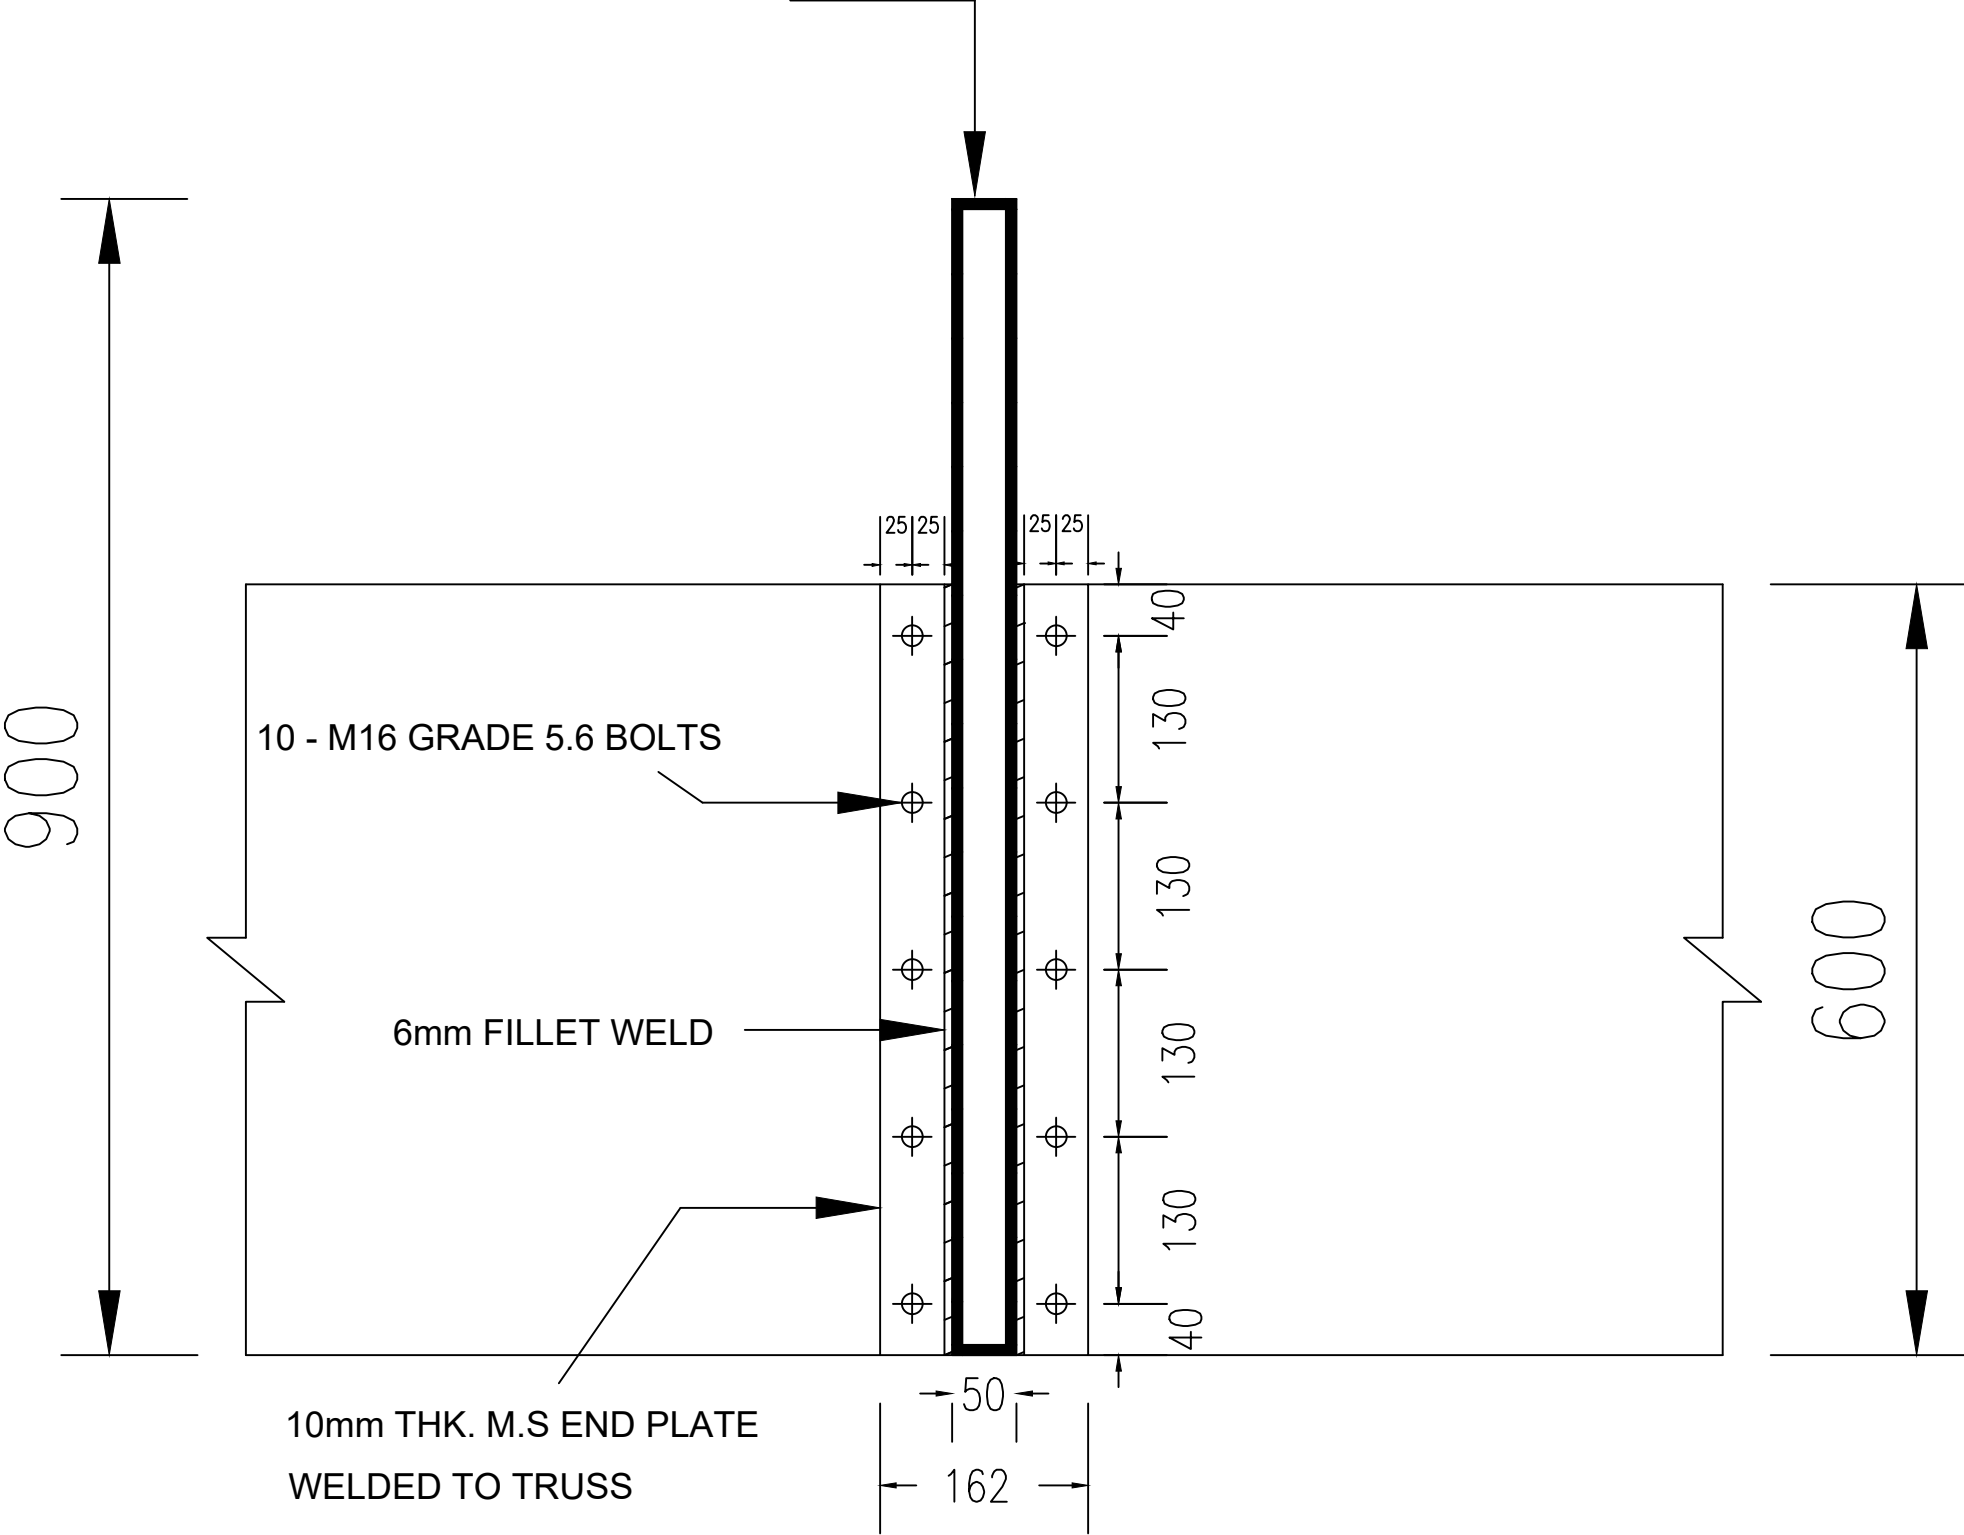


DETAIL - C

RHS 80mm X 40mm X 5mm Thk.

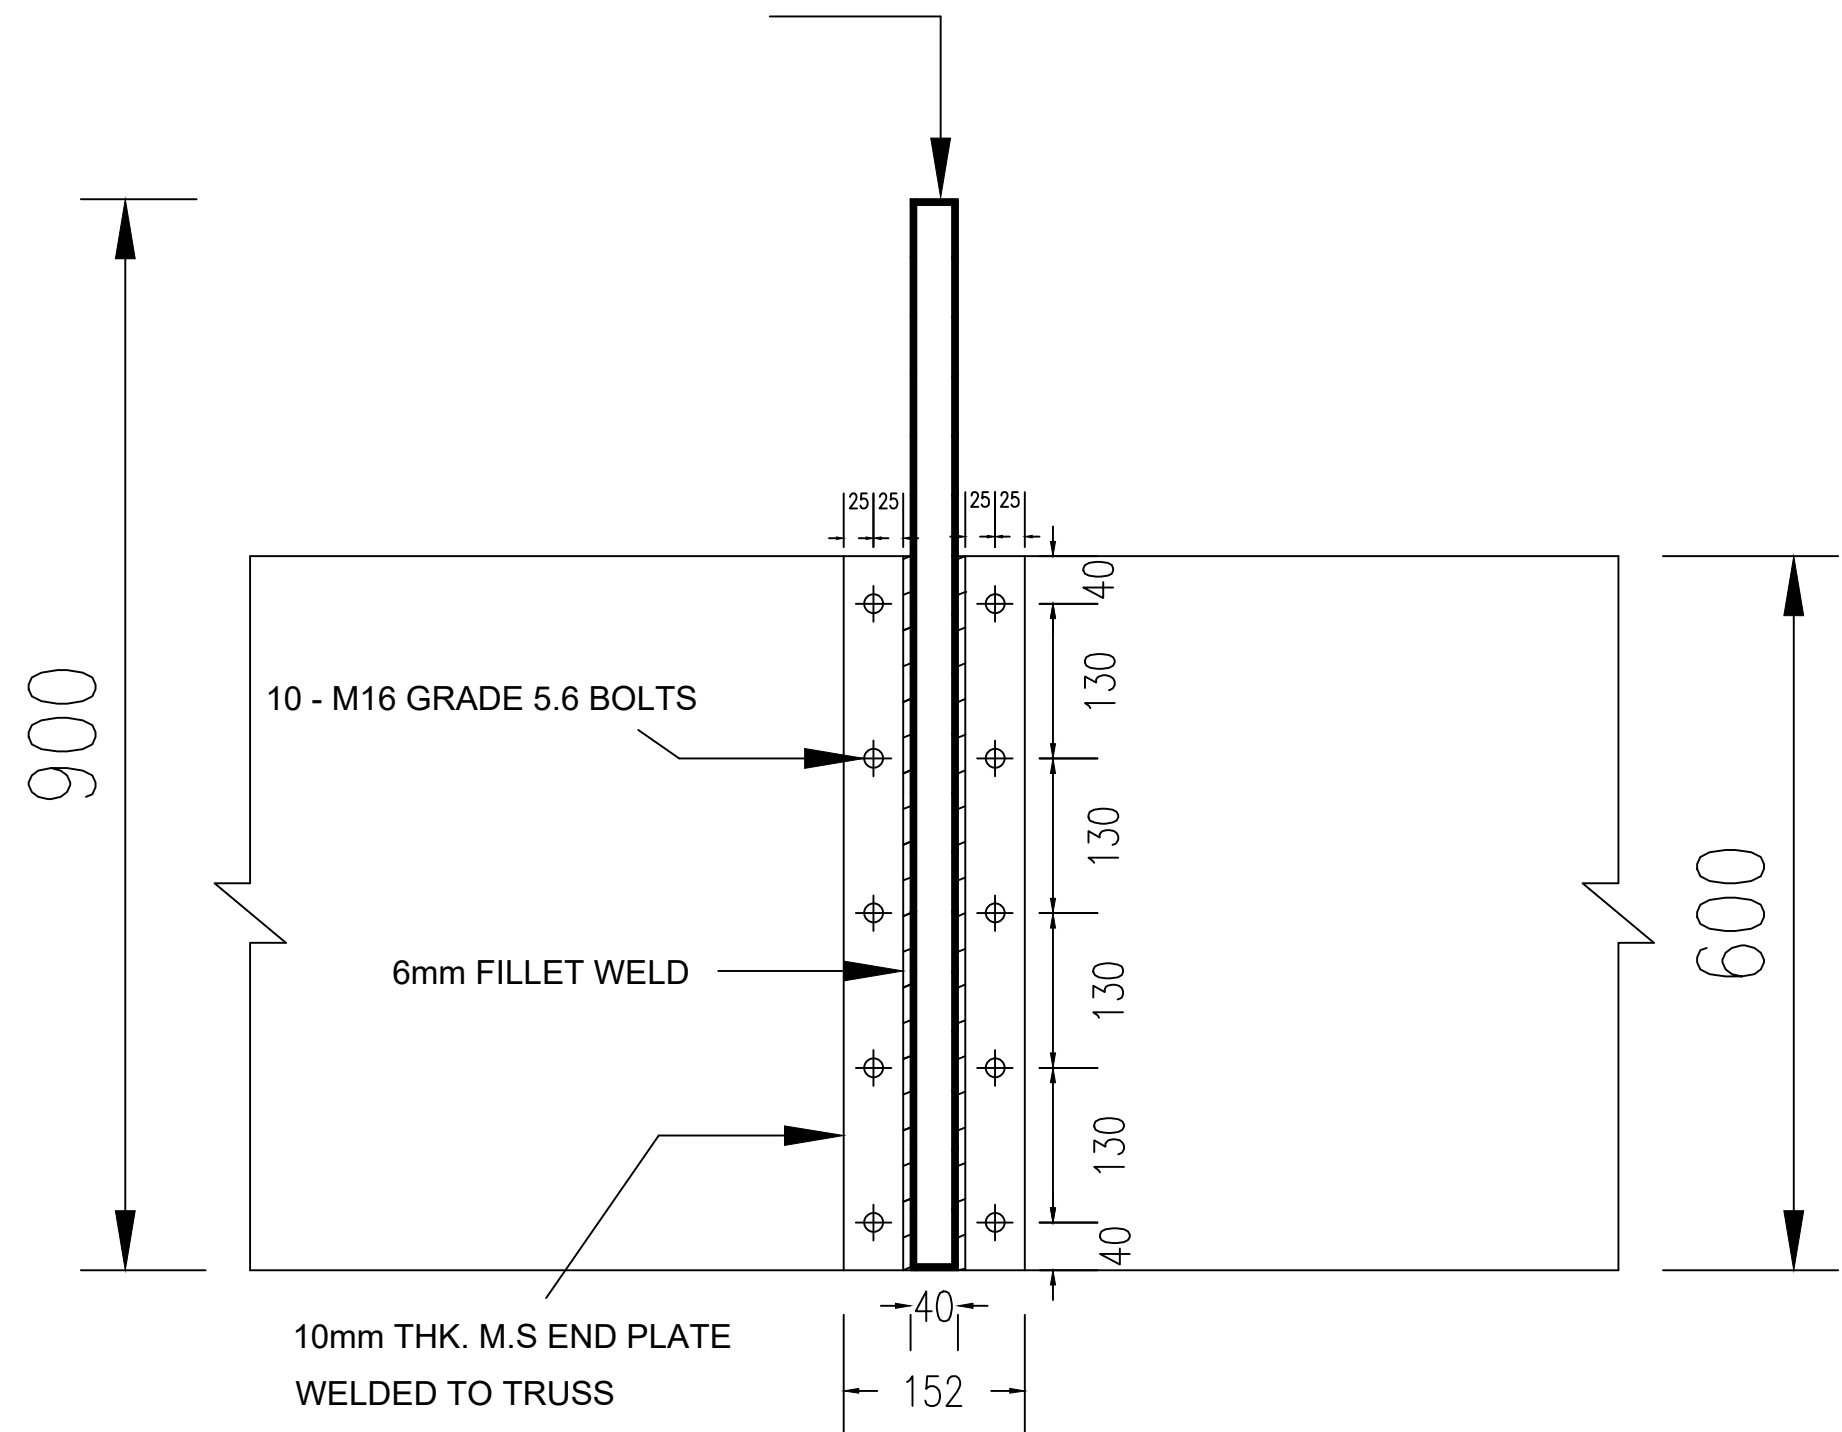


DETAIL - D


RHS 80mm X 40mm X 5mm Thk.

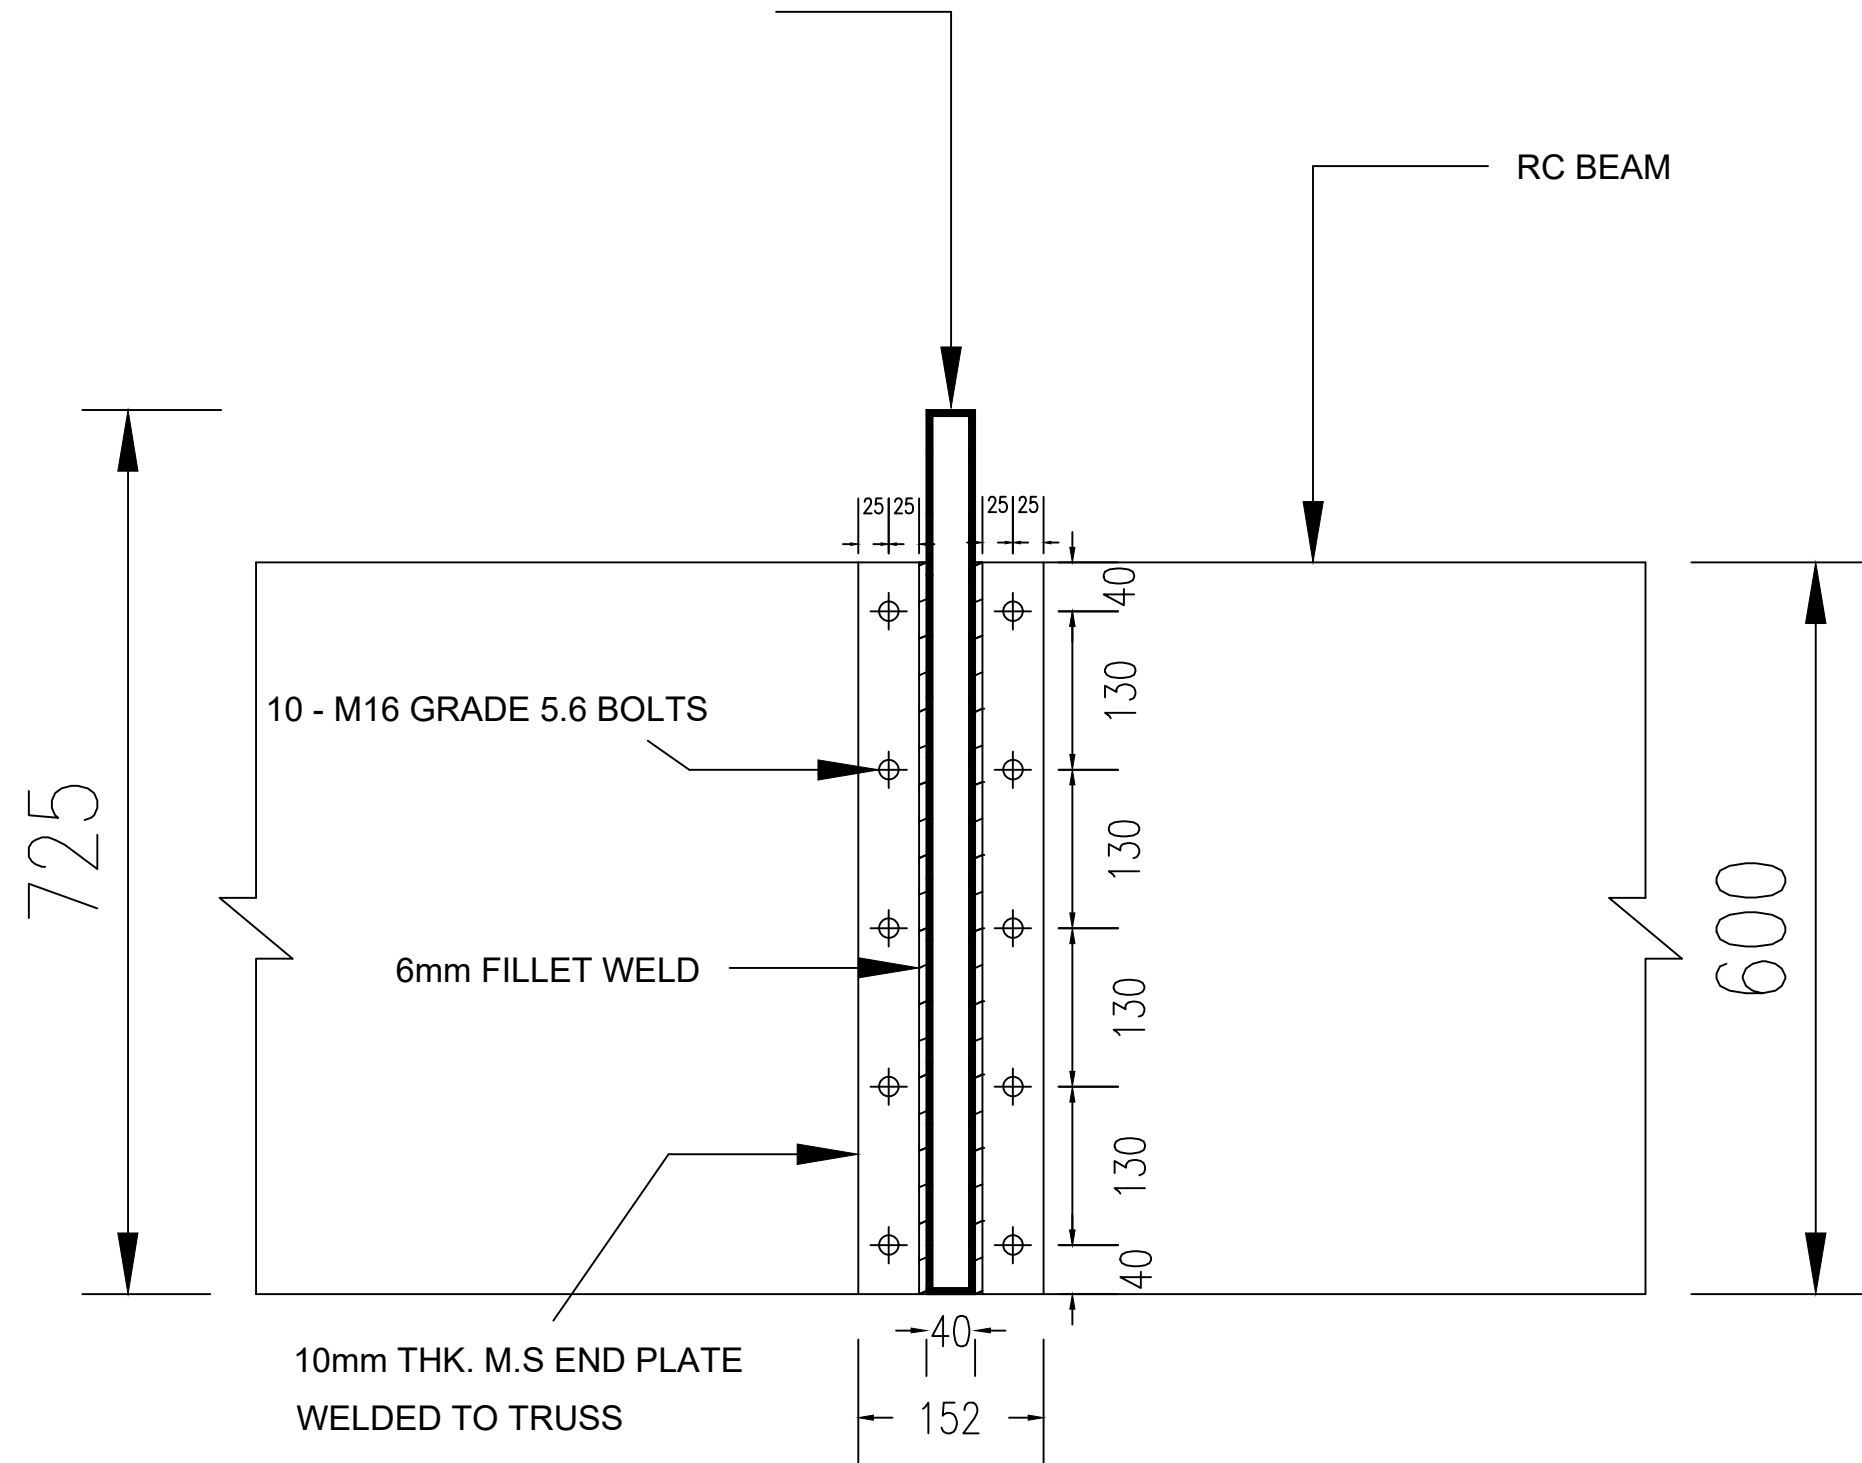


DETAIL - E

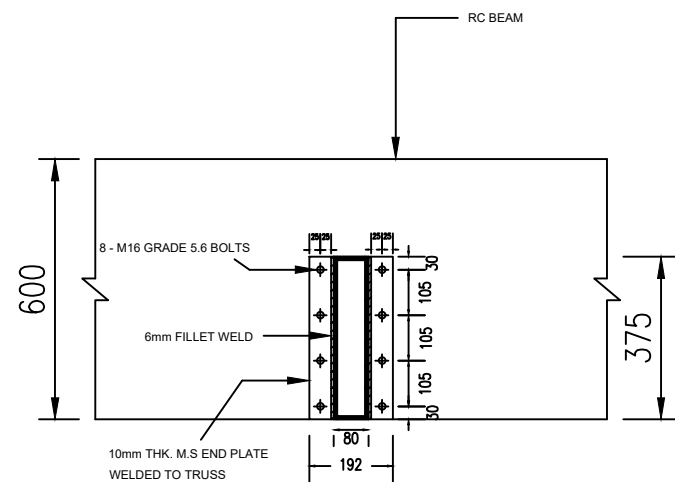


DETAIL - A

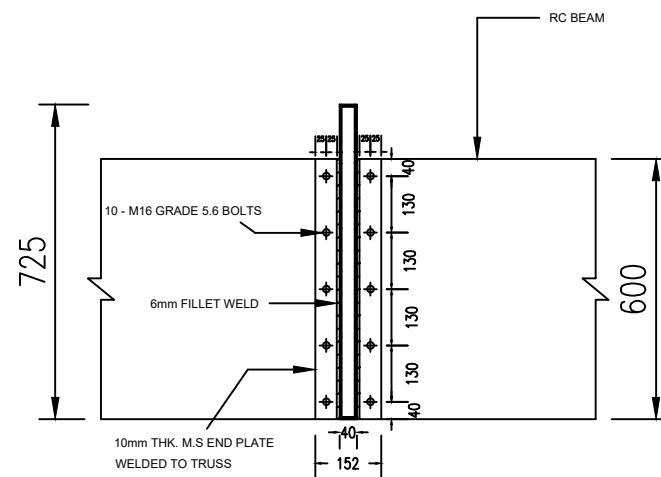


DETAIL - E

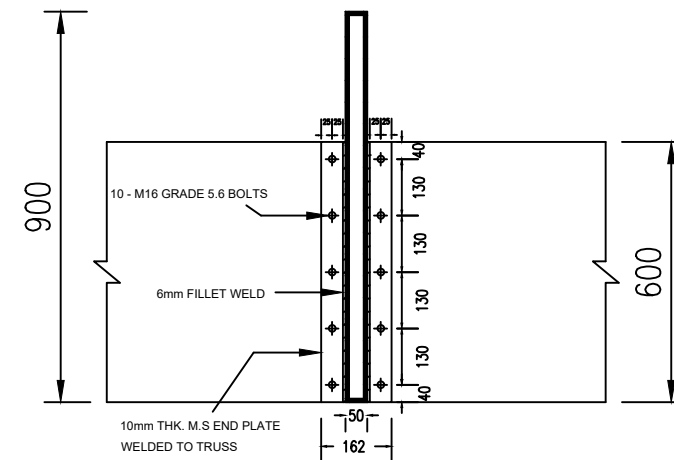

DETAIL - C

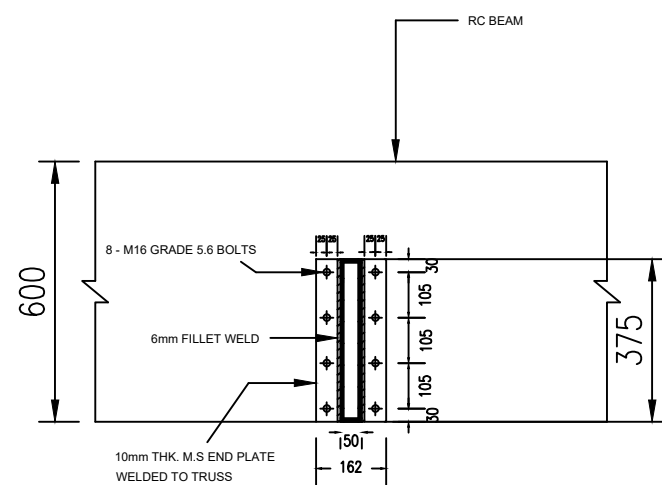

DETAIL - B

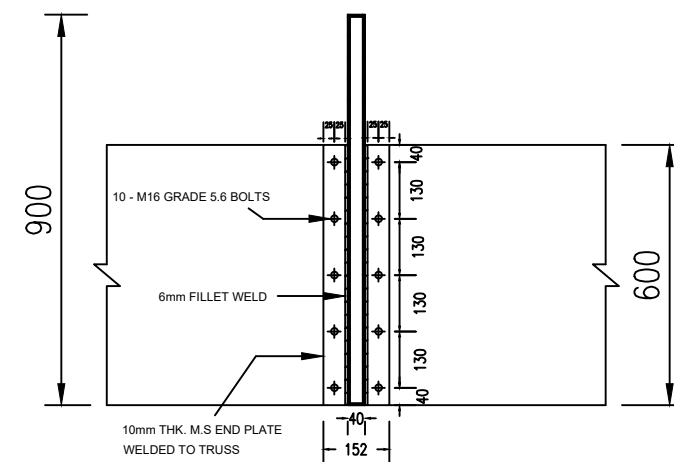

DETAIL - D